

## OVERVIEW

### A Brief History of KwikLink

As the acceptance of networking continues to increase with major vendors and OEMs, DeviceNet is moving into the forefront as a viable *and* reliable solution. A group of engineers was assembled to take DeviceNet to the next level. The first step to realizing this goal: dispel DeviceNet's reputation as being cost prohibitive. It was this factor that led to the development of a more cost-effective physical media system. The result of these efforts is KwikLink, a concept that introduces flat cable technology with simple clamp-on insulation displacement connections, addressing the concerns most often stressed by the customer: low cost, flexibility, simplicity and compatibility.

Figure 1: KwikLink Connector and Cable



## INTRODUCTION

### Introduction to KwikLink

The KwikLink flat media system is a simple, modular cabling method for DeviceNet that uses flat four-wire cable and Insulation Displacement Connectors (IDCs). Designed to achieve 50% savings in installation costs by offering a drastic reduction in labor and materials, the KwikLink system is ODVA approved and allows nodes to be added to the network quickly and easily—without severing the trunkline. Cutting and stripping of the trunkline is eliminated, as is the need for predetermined cable lengths. KwikLink offers maximum simplicity while still supporting 64 nodes. There is, however, a small reduction in maximum trunk length as shown in the figure below.

Figure 2: KwikLink vs. Round Cable—Distances

Data Rates	125 Kbaud	250 Kbaud	500 Kbaud
Thick Trunk Dist.	500m (1640ft)	250m (820ft)	100m (328ft)
Thin Trunk Dist.	100m (328ft)	100m (328ft)	100m (328ft)
Flat Trunk Dist.	420m (1378ft)	200m (656ft)	75m (246ft)
Max. Drop Length	6.1m (20ft)	6.1m (20ft)	6.1m (20ft)
Cumulative Drop	156m (512ft)	78m (256ft)	39m (128ft)
Number of Nodes	64	64	64

In order to use the quicker IDC type connections, shields were removed and the cable was made in a flat configuration. Removal of the shields also significantly reduced materials costs.

# AB Parts

**Allen-Bradley**


**The Issue...**

Since KwikLink was unveiled, the most common concern: flat cable is unshielded. Why? The simple answer is that the quick IDC connections mentioned above are very difficult if not impossible with shielded cable. And what happens to noise immunity? Noise immunity—the testing procedure, the result and the conclusion—is the issue to be addressed in the following pages.

**Cable Construction and Noise Immunity**


In general, both DeviceNet media systems, round and flat, are high speed, low loss cables. The two signal conductors, CAN\_H and CAN\_L, allow for a differential transmission system. That is, as CAN\_H voltage drops 2.5 Volts, CAN\_L increases by 2.5 Volts; it is the difference between them that is used by DeviceNet protocol. The differential between CAN\_H and CAN\_L is either zero or 5V. When noise is induced in the cable, the voltage spike affects both signal conductors equally—therefore the voltage differential between the two is maintained. By using this technique, DeviceNet has an inherent level of noise immunity.

*Figure 3: Differential Transmission*

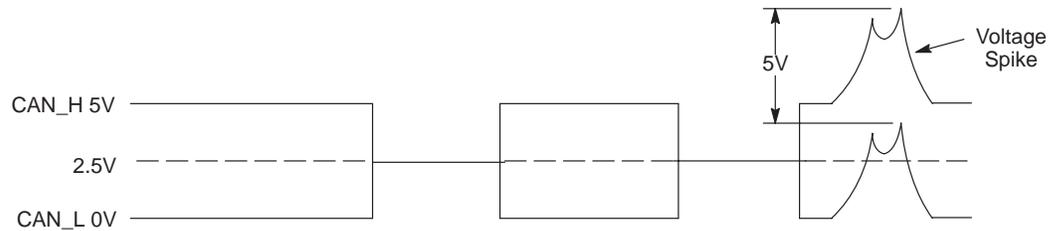

There are several physical nuances that differentiate the two cables: TPE jacket as opposed to PVC; varying conductor gauges; twisted versus untwisted pairs. But, in addressing the level of noise immunity between them, the basic construction—the orientation of the conductors as well as shielding or the lack thereof—becomes crucial. Note the conductor spacing in the flat cable (Figure 4):

*Figure 4: KwikLink vs. Round Cable—Construction*

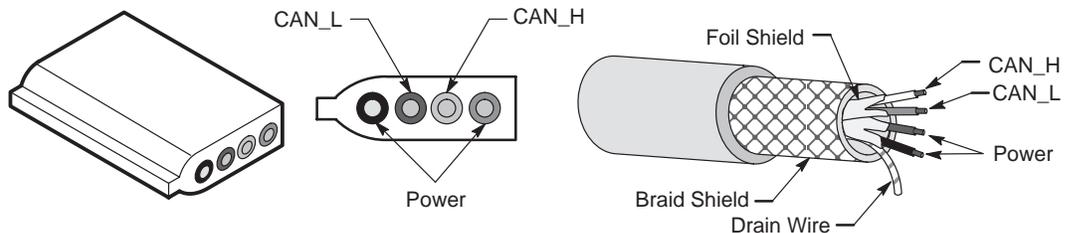


The spacing between the CAN signal conductors is minimal while the distance between the signal and power conductors is relatively great; this greater distance inhibits noise coupling from the power wires to the CAN lines. The horizontal arrangement of the conductors, as opposed to the tightly bundled conductors in the round cable, also plays a large role in the capacitance unbalance of the system.

## Radiated Immunity Testing

All electronic equipment radiate some electromagnetic energy. Radiated immunity is the ability of the equipment, in this case the DeviceNet network, to operate properly without being affected by the electromagnetic interference from neighboring equipment, like walkie-talkies, cellular phones, radio and television broadcasts, RF tagged equipment, and computers. To meet the International Electrotechnical Commissions (IEC) requirements for immunity, electrical equipment is tested to IEC 61000-4-3, *Testing and Measurement Techniques—Section 3: Radiated, Radio Frequency, Electromagnetic Field Immunity Test*.


Initial noise immunity tests commenced in a lab setup, pitting standard DeviceNet round cable against KwikLink flat cable. For each instance, equal lengths of round and flat cable were mounted on a wooden panel and zig-zagged to maximize exposure to the RF signal, in a setup as shown in Figure 5.

Figure 5. Radiated Noise Test Setup

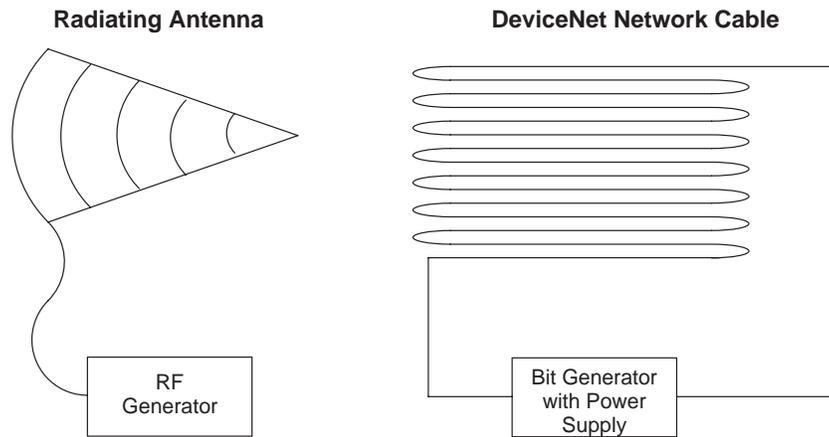

A special black box produced a continuous stream of traffic on the network, allowing performance to be monitored at the bit level. DeviceNet protocol sends information in packets—small groupings of data bits—with gaps between. A continuous data stream was used to maximize traffic along the wire.

Figure 6: Packetized Data vs. Continuous Stream

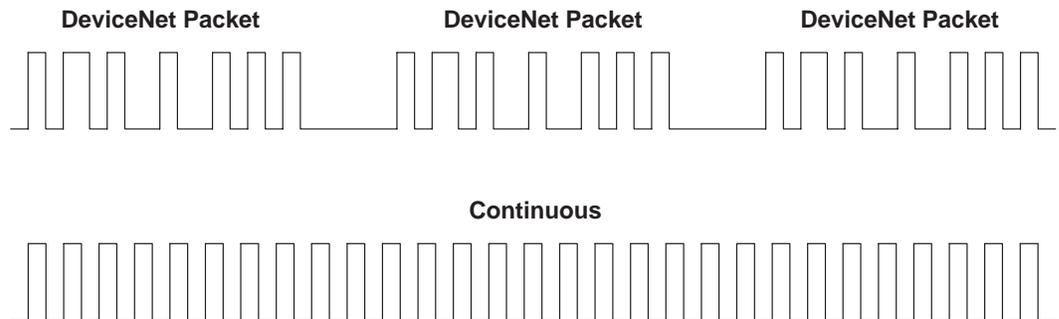

Both cable systems were first exposed to a radiated field of 10V/m, the IEC specification for industrial environments. Both systems operated without errors. The radiated field was then set to 20V/m, double the IEC specification. Again,

AB Parts

there were no errors on either system. This same test was repeated with shielded and unshielded drop cables and actual devices connected to the drops; again, no errors or loss of communications. This test demonstrated that both DeviceNet round and flat cable systems have a high level of immunity to radiated noise as would be expected from a well-balanced, differential transmission system such as DeviceNet.

### **Radiated Emissions Testing**

As stated earlier, all electronic equipment radiate some electromagnetic energy. In this scenario, the equipment is tested to determine how much energy is radiated over a frequency range of 27MHz to 1GHz. The strategy of the standard is to limit the amount of energy emitted by equipment and ensure the equipment is immune to certain levels of radiated energy. The requirement for radiated emissions is stated in EN50081–2 *Electromagnetic Compatibility—Generic Emission standard, Part 2: Industrial Environment* and CISPR 11.

When the round cable was compared to the flat cable, the results showed that both cable systems met the IEC requirements. The flat cable actually had lower emissions than the round cable; this was attributed to the ground loops formed between the shield of the round cable and the ground of the anechoic (echo-free) test chamber.

### **Drives Testing**

The next step was to test the cables in a ‘real world’ application and determine DeviceNet’s ability to survive in high voltage environments, more precisely, Class 1 (600V) environments. Drives testing is a new Rockwell Automation/Allen-Bradley requirement; there is no specific IEC test requirement. Field experience has shown that drives using Insulated Gate Bipolar Transistor (IGBT) technology cause transients on the power and ground lines that may affect neighboring equipment in one of three ways: 1) through the ground path, 2) through the same power grid, or 3) through signal wires that run near the power wires.

The fast rise times of pulse width modulated, high voltage drive systems (IGBT drives typically have rise times on the order of 50 nanoseconds) can often induce interference in low-level communications. The resulting frequency content of a pulse width modulated drive is therefore also extremely high. The associated rise times and field magnitudes may cause voltage fluctuations on the order of 10kV per microsecond. To test for the effects of these variables on a DeviceNet system, round and flat cables were exposed to the fields associated with IGBT drives.


The procedure required a similar setup to the previous test. Round and flat cables of equal lengths were connected to the special fixture that produced a uniform data stream and allowed for continuous bit-level performance checks. However, the trunk cables in question were routed from the drive output, along the drive cables and to the motor. The drive was a 50HP model running at 460V with a carrier of 6kHz.

The test was conducted using various round cable configurations for connecting the shield and V– to ground. Standard round cable exhibited errors only when V– and the shield were terminated together at drive ground; *not* a recommended

grounding scheme. Error rates for this configuration were high enough to cause nodes to enter a bus-off state. **All other configurations, including those involving the unshielded flat cable, were error free.**

It was discovered that the inherent distributed capacitance between the shield and the conductors provided coupling for noise. The capacitance between the shield and conductors of the round cable is 24pF/ft. Figure 7 shows an example of how to view distributed capacitance. Distributed capacitance is like adding a small capacitor between the shield and each of the signal wires every foot.

Figure 7. Distributed Capacitance

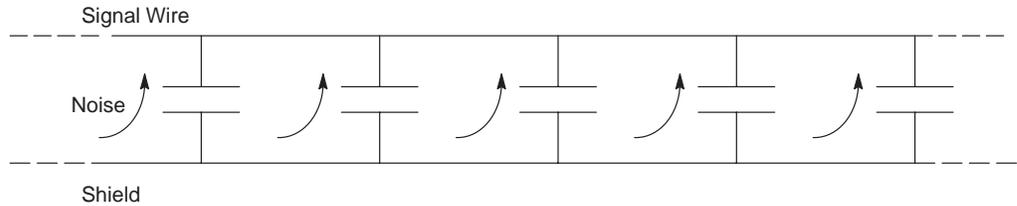

For example, a 152m (500ft) network would provide 12,000pF of capacitance. The impedance of a capacitor is related to frequency of a signal (or noise) as

$$X_c = \frac{1}{2\pi fc}$$

Rise times on the order of 50ns have frequency components up to 20Mhz. Therefore the impedance of the distributed capacitance is

$$X_c = \frac{1}{2\pi * 20,000,000 * 0.00000012} = 1.5 \text{ ohms}$$

Obviously, the impedance of the total distributed capacitance of the 152m (500ft) network is very low to a 20Mhz noise pulse. When the shield is connected to a noisy ground, in this case drive ground, noise can travel along the shield, couple to the power and signal conductors and possibly cause data errors.

### Conclusion

In summary, since DeviceNet is a differential transmission based system, it is inherently immune to common mode type noise. While standard round DeviceNet cable provides excellent common mode rejection, currents in the shields can couple noise into the conductors.

KwikLink flat cable is *not* shielded, and it exhibits superior resistance to typical industrial types of noise—it has no coupling mechanism for noise. So, not only does KwikLink reduce the installation cost of a DeviceNet network, but it reflects a giant leap in enhancing noise immunity.

---

**Reach us now at [www.rockwellautomation.com](http://www.rockwellautomation.com)**

Wherever you need us, Rockwell Automation brings together leading brands in industrial automation including Allen-Bradley controls, Reliance Electric power transmission products, Dodge mechanical power transmission components, and Rockwell Software. Rockwell Automation's unique, flexible approach to helping customers achieve competitive advantage is supported by thousands of authorized partners, distributors and system integrators around the world.

**Americas Headquarters**, 1201 South Second Street, Milwaukee, WI 53204 USA, Tel: (1) 414 382-2000 Fax: (1) 414 382-4444

**European Headquarters SA/NV**, avenue Hermann Debroux, 46, 1160 Brussels, Belgium, Tel: (32) 2 663 06 00 Fax: (32) 2 663 06 40

**Asia Pacific Headquarters**, 27/F Citicorp Centre, 18 Whitfield Road, Causeway Bay, Hong Kong, Tel: (852) 2508 1846 Fax: (852) 2508 1846

Publication 1485-1.1, November 1998



**Rockwell  
Automation**

Copyright 1998 Rockwell Automation. Printed in USA