




Installation Instructions

FLEX Integra 2 Output Analog Module

(Cat. No. 1793-0E2 and -0E2S)




41353

Module Installation

This module mounts on a DIN rail. It connects to an adapter or another FLEX I/O or Integra module. Note: If using this module with FLEX I/O modules, do not mount between FLEX I/O modules. Mount Integra modules to the right of the FLEX I/O modules. To mount this module:


1. Remove the cover plug (if used) in the male connector of the unit to which you are connecting this module.
2. Position the module on the 35 x 7.5mm DIN rail **A** (A-B pt. no. 199-DR1). Rotate the terminal base onto the DIN rail with the top of the rail hooked under the lip on the rear of the terminal base.

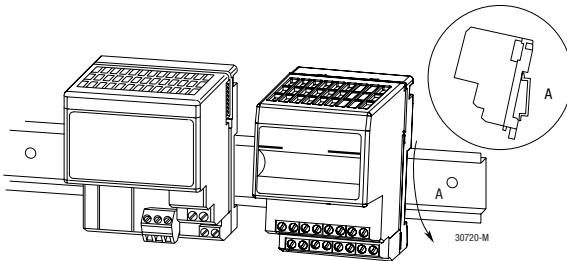

FLEX Integra and FLEX I/O are trademarks of Rockwell Automation


Publication 1793-5.5 - June 1999

3. Press down to lock the module on the DIN rail.

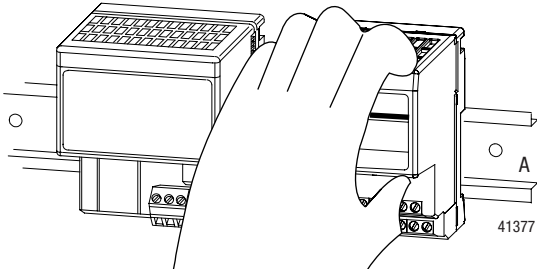


If the module does not lock in place, use a screwdriver of similar device to move the locking tab down, press the module flush with the DIN rail and release the locking tab to lock the module in place

4. Firmly push the module into the adjacent module/terminal base until the units lock together.

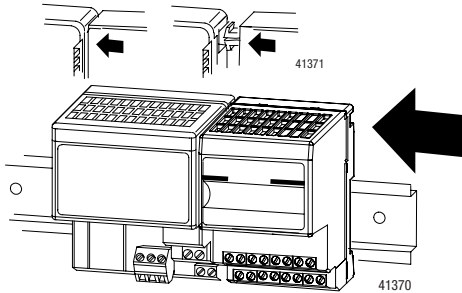

5. Repeat the above steps to install the next terminal base.
6. To remove an Integra module, you must work from the right side and remove one module at a time. To disengage a module from its neighbor, place a common flat-bladed screwdriver between the 2 modules and turn 1/4 turn to separate the modules.



7. Then slide the module away from its left neighbor, and release the locking lever to remove the module from the DIN rail.



ATTENTION: Do not remove this module under power. Removing this module under power will break the electrical backplane (flexbus) connections. This can cause personal injury or property damage by:

- sending an erroneous signal to your system's field devices causing unintended machine motion
 - causing an explosion in a hazardous environment
 - breaking communication to modules beyond this module
-

European Union Directive Compliance

If this product has the CE mark it is approved for installation within the European Union and EEA regions. It has been designed and tested to meet the following directives.

EMC Directive

This product is tested to meet Council Directive 89/336/EEC Electromagnetic Compatibility (EMC) and the following standards, in whole or in part, documented in a technical construction file:

- EN 50081-2 EMC - Generic Emission Standard, Part 2 - Industrial Environment
- EN 50082-2 EMC - Generic Immunity Standard, Part 2 - Industrial Environment

This product is intended for use in an industrial environment.

Low Voltage Directive

This product is tested to meet Council Directive 73/23/EEC Low Voltage, by applying the safety requirements of EN 61131-2 Programmable Controllers, Part 2 - Equipment Requirements and Tests.

For specific information required by EN 61131-2, see the appropriate sections in this publication, as well as the following Allen-Bradley publications:

- Industrial Automation Wiring and Grounding Guidelines For Noise Immunity, publication 1770-4.1
- Automation Systems Catalog, publication B111

This equipment is classified as open equipment and must be mounted in an enclosure during operation to provide safety protection.

4. If daisy-chaining +24V dc from this module to the next FLEX Integra module, connect a jumper from terminal 15 to terminal 8 on the next FLEX Integra module.
5. If daisy-chaining 24V dc common from this module to the next FLEX Integra module, connect a jumper from terminal 7 on this module to terminal 0 on the next Integra module.




ATTENTION: Total current draw through the module's 24V dc terminals is limited to 10A. Separate power connections to the module may be required.


Wiring Connections

Channel	Signal Type	Label Markings	Signal	Return
Output				
0	Current	I	2	
	Current Common	RET		1
	Voltage	I	3	
	Voltage Common	RET		1
1	Current	I	4	
	Current Common	RET		6
	Voltage	I	5	
	Voltage Common	RET		6
+24V dc	Terminals 8 and 15			
24V dc common	Terminals 0, 1, 6, 7, 9, 14			

Examples of Sensor Wiring

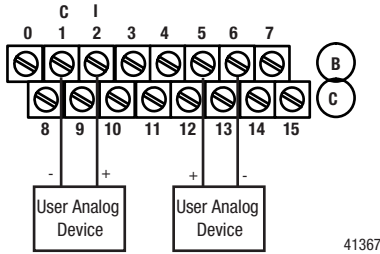

Indicators

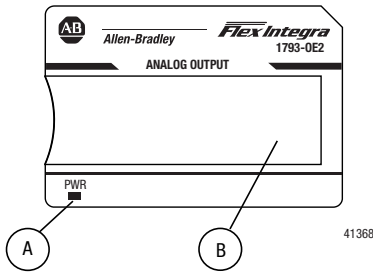

A = Power indicator - indicates power applied to module

B = Insertable label for writing individual output designations

Input Map

Bit/ Word	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00
Read																
0	PU	Reserved													W1	W0

Where: S = Sign bit

W = Diagnostic bit for current output wire broken or load resistance high.

Output Map





Bit/ Word	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00
Write																
0	S	Analog Data for Channel 0														
1	S	Analog Data for Channel 1														
2-3	Reserved															
4															M1	M0
5	0	0	0	0	0	0	C 1	C 0	0	0	0	0	0	0	F1	F0
6-9	Not used - Set to 0															
10	S	Safe State value for output Channel 0														
11	S	Safe State value for output Channel 1														
12-13	Reserved															

Where: M = Multiplex bits
 C = Configure Select bit
 S = Sign bit (in 2's complement)
 F = Full range bit

Range Selection Bits

Out Ch. 0		Channel No.	Out Ch. 0		Out Ch. 1	
F4	C4		F0	C0	F1	C1
04	12	Dec.Bit	00	08	01	09
Write						
1	0	0-10V dc/20mA	1	0	1	0
0	1	4-20mA	0	1	0	1
1	1	-10 to +10V dc	1	1	1	1
0	0	Off ¹	0	0	0	0

Where: F = Full Range bit
 C = Configure Select bit
¹ When configured to Off, individual input channels will return 0000H
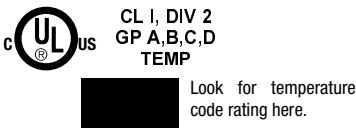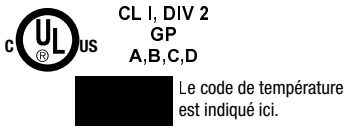
<p>CUL Hazardous Location Approval</p>	<p>Approbation d'utilisation dans des environnements dangereux par la CUL</p>
<p>CUL certifies products for general use as well as for use in hazardous locations. Actual CUL certification is indicated by the product label as shown below, and not by statements in any user documentation.</p>	<p>La CUL certifie des produits pour une utilisation générale aussi bien que pour une utilisation en environnements dangereux. La certification CUL en vigueur est indiquée par l'étiquette produit et non par des indications dans la documentation utilisateur.</p>
<p>Example of the CUL certification product label:</p> 	<p>Exemple d'étiquette de certification d'un produit par la CUL :</p> 
<p>To comply with CUL certification for use in hazardous locations, the following information becomes a part of the product literature for this CUL-certified industrial control product.</p> <ul style="list-style-type: none"> • This equipment is suitable for use in Class I, Division 2, Groups A, B, C, D, or non-hazardous locations only. • The products having the appropriate CUL markings (that is, Class I, Division 2, Groups A, B, C, D) are certified for use in other equipment where the suitability of combination (that is, application or use) is determined by the CUL or the local inspection office having jurisdiction 	<p>EPour satisfaire à la certification CUL en environnements dangereux, les informations suivantes font partie intégrante de la documentation des produits de commande industrielle certifiés.</p> <ul style="list-style-type: none"> • Cet équipement ne convient qu'à une utilisation dans des environnements de Classe I, Division 2, Groupes A, B, C, D ou non dangereux. • Les produits portant le marquage CUL approprié (c'est-à-dire Classe I, Division 2, Groupes A, B, C, D) sont certifiés pour une utilisation avec d'autres équipements, les combinaisons d'applications et d'utilisation étant déterminées par la CUL ou le bureau local d'inspection.
<p>Important: Due to the modular nature of a programmable control system, the product with the highest temperature rating determines the overall temperature code rating of a programmable control system in a Class I, Division 2, location. The temperature code rating is marked on the product label as shown.</p>	<p>Important: De par la nature modulaire des systèmes de commande programmables, le produit ayant le code de température le plus élevé détermine le code de température global du système dans un environnement de Classe I, Division 2. Le code de température est indiqué sur l'étiquette produit.</p>
<p>Temperature code rating:</p> 	<p>Code de température :</p> 
<p>The following warnings apply to products having CUL certification for use in hazardous locations.</p>	<p>Les avertissements suivants s'appliquent aux produits ayant la certification CUL pour une utilisation dans des environnements dangereux.</p>

CUL Hazardous Location Approval	Approbation d'utilisation dans des environnements dangereux par la CUL
<p>ATTENTION: Explosion Hazard</p> <ul style="list-style-type: none"> • Substitution of components may impair suitability for Class I, Division 2. • Do not replace components unless power has been switched off or the area is known to be non-hazardous. • Do not disconnect equipment unless power has been switched off or the area is known to be non-hazardous. • Do not disconnect connectors unless power has been switched off or the area is known to be non-hazardous. Secure any user-supplied connectors that mate to external circuits on this equipment by using screws, sliding latches, threaded connectors, or other means such that any connection can withstand a 15 Newton (3.4 lb.) separating force applied for a minimum of one minute. • Batteries must only be changed in an area known to be non-hazardous. 	<p>AVERTISSEMENT : Risque d'explosion</p> <ul style="list-style-type: none"> • La substitution de composants peut rendre ce matériel inadapté à une utilisation en environnement de Classe I, Division 2. • Couper le courant ou s'assurer que l'environnement est classé non dangereux avant de remplacer des composants. • Couper le courant ou s'assurer que l'environnement est classé non dangereux avant de débrancher l'équipement. • Couper le courant ou s'assurer que l'environnement est classé non dangereux avant de débrancher les connecteurs. Fixer tous les connecteurs fournis par l'utilisateur pour se brancher aux circuits externes de cet appareil à l'aide de vis, loquets coulissants, connecteurs filetés ou autres, de sorte que les connexions résistent à une force de séparation de 15 Newtons (1,5 kg - 3,4 lb.) appliquée pendant au moins une minute. • S'assurer que l'environnement est classé non dangereux avant de changer les piles.
<p>CUL logo is a registered trademark of the Underwriters Laboratories.</p>	<p>Le sigle CUL est une marque déposée de la Underwriters Laboratories.</p>

Specifications - 2 Output Analog Module, Cat. No. 1793-0E2 and -0E2S

Module Type	2 analog output 1793-0E2 - 16 screw-cage terminals 1793-0E2S - 16 spring-clamp terminals
Module Location	DIN rail mounting
Number of Channels	2 out - nonisolated

Output

Resolution	12-bits plus sign
Voltage	2.56mV/cnt
Current	5.13 μ A/cnt
Data Format	left justified 16-bit 2's complement
Conversion Type	Pulse width modulation
Conversion Rate	1.024ms all channels
Current Terminal	4-20mA (user configurable) 0-20mA (user configurable)
Voltage Terminal	\pm 10V (user configurable) 0-10V (user configurable) 3A maximum
Step Response to 63%	
Voltage Terminal	24ms
Current Terminal	24ms
Impedance	
Voltage Terminal	15-750 Ω resistive
Current Terminal	15-750 Ω resistive
Absolute Accuracy	
Voltage Terminal	0.133% FS @ 25 $^{\circ}$ C
Current Terminal	0.425% FS @ 25 $^{\circ}$ C
Accuracy Drift	
Voltage Terminal	0.0045% FS per $^{\circ}$ C
Current Terminal	0.0069% FS per $^{\circ}$ C
Isolation Voltage	Channel to system - 850V dc for 1s Channel to channel - None

General

Flexbus Current	20mA maximum
Power Dissipation	2.5W @ 31.2V dc
Thermal Dissipation	8.5 BTU/hr @ 31.2V dc
Indicators	1 green power indicators
External dc Power	19.2-31.2V dc (5% ac ripple)
Voltage	
Current	70mA maximum

Specifications - 2 Output Analog Module, Cat. No. 1793-OE2 and -OE2S

Dimensions	in (mm)	2.72H x 3.15D x 2.17W (69H x 80D x 55W)
Environmental Conditions		
Operational Temperature		0 to +55°C (32 to +131°F)
Storage Temperature		-40 to +85°C (-40 to +185°F)
Relative Humidity		5 to 95% noncondensing
Shock	Operating	Tested to 30g peak acceleration, 11(±1)ms pulse width
	Nonoperating	Tested to 50g peak acceleration, 11(±1)ms pulse width
Vibration		Tested 5g @ 10-500Hz per IEC68-2-6
Conductors	Wire Size	12 gauge (4mm ²) stranded wire
	Category	3/64 in (1.2mm) maximum insulation 2
Screw Terminal Torque		7-9 lb-in
Agency Certification (when product is marked)		<ul style="list-style-type: none"> • CUL Listed • CUL Class I, Division 2 Groups A, B, C and D certified • UL listed • CE marked for all applicable directives
User Manual		<ul style="list-style-type: none"> • Publication 1793-6.5.1

¹ Use this category information for planning conductor routing as described in publication 1770-4.1, "Wiring and Grounding Guidelines for Noise Immunity."

User Manual

Thank you for purchasing this product. This product has a user manual associated with it. If you would like a manual, you can:

- download a free electronic version from the internet: www.ab.com/manuals or www.theautomationbookstore.com
- purchase a printed manual by:
 - contacting your local distributor or Rockwell Automation representative
 - visiting www.theautomationbookstore.com and placing your order
 - calling 1.800.9NEWLIT(800.963.9548) (USA/Canada) or 001.330.725.1574 (Outside USA/Canada)

The publication number of the user manual for your product is listed under “Specifications” in the installation instructions or quick start shipped with your product.

Reach us now at www.rockwellautomation.com

Wherever you need us, Rockwell Automation brings together leading brands in industrial automation including Allen-Bradley controls, Reliance Electric power transmission products, Dodge mechanical power transmission components, and Rockwell Software. Rockwell Automation's unique, flexible approach to helping customers achieve a competitive advantage is supported by thousands of authorized partners, distributors and system integrators around the world.

Americas Headquarters, 1201 South Second Street, Milwaukee, WI 53204, USA, Tel: (1) 414 382-2000, Fax: (1) 414 382-4444
European Headquarters SA/NV, avenue Herrmann Detroix, 46, 1160 Brussels, Belgium, Tel: (32) 2 663 06 00, Fax: (32) 2 663 06 40
Asia Pacific Headquarters, 27/F Citicorp Centre, 18 Whitfield Road, Causeway Bay, Hong Kong, Tel: (852) 2887 4788, Fax: (852) 2508 1846

Publication 1793-5.5 - June 1999

Supersedes Publication 1793-5.5 - December 1998



**Rockwell
Automation**

PN 955132-18A

© (1999) Rockwell International Corporation. Printed in USA