

Medium Voltage Motor Controller Reduced Voltage Autotransformer

Bulletin 1572 • Non-Reversing
Bulletin 1576 • Reversing

Product Profile

Convenience, Reliability and Safety

The Allen-Bradley Reduced Voltage Autotransformer controller offers:

- Three isolated compartments:
 - Power bus
 - Low voltage
 - Power cell
- Large swing-out low voltage panel, painted white for high visibility
- Test circuit plug for external power supply
- External operating handle to operate the isolation switch
- NEMA medium duty three winding autotransformer
- Closed transition operation
- Bolted power cell doors
- Centerline® horizontal power bus with removable cover plates for accessibility
- ¼" x 2" continuous copper ground bus
- Line, load and control wire conduit openings with removable cover plates at the top and bottom of the structure
- Base mounting sill channels with mounting holes and removable lifting means
- Hybrid epoxy powder paint finish

Power Cell Standard Features

- NEMA Class E2 design
- Non-load break isolation switch with visible blades and shutter mechanism
- Three (3) current limiting power fuses
- Three (3) 400 amp, fixed mounted vacuum contactors, 1S, 2S and Run (An additional vacuum contactor is provided for reversing applications)
- Three (3) current transformers
- Mechanical and electrical interlocks
- Control circuit transformer (120VAC secondary) with primary and secondary fuses
- Viewing window in power cell door



General Specifications

System Voltages:	2400 V, 3300 V, 4160 V, 4800 V
	Higher voltages up to 7200 V are also available.
Controller Amp Ratings:	200 A, 400 A, 600 A (1572 only), 800 A
Maximum HP/kW Ratings:	3500 HP / 2600 kW – 2400 V
	5000 HP / 3700 kW – 3300 V
	6000 HP / 4500 kW – 4160 V
Standards:	NEMA ICS 3-2
	UL 347
	CSA C22.2 No. 14
	ANSI C57.13




General Specifications (cont.)

	1572 Controller		1576 Controller	
Amps	Dimensions W x H x D	Approx. Weight in Lb (kg)	Dimensions W x H x D	Approx. Weight in Lb (kg)
200/400	56 x 91 x 36 in. (1422 x 2315 x 915 mm)	3750 lb (1703 kg)	80 x 91 x 36 in. (2032 x 2315 x 915 mm)	3750 lb (1703 kg)
600	80 x 91 x 36 in. (2032 x 2315 x 915 mm)	5000 lb (2270 kg)	NA	NA
800	100 x 91 x 36 in. (2540 x 2315 x 915 mm)	5000 lb (2270 kg)	100 x 91 x 36 in. (2540 x 2315 x 915 mm)	5000 lb (2270 kg)

Enclosure Type	Paint Finishes
<ul style="list-style-type: none"> ▪ Type 1 – General purpose ▪ Type 1 w/g – General purpose with gasket ▪ Type 12 – Dust-tight and drip proof ▪ Type 3R – Non walk-in weatherproof 	<ul style="list-style-type: none"> ▪ ANSI 49 – medium light grey (standard) ▪ ANSI 61 – light grey (optional)

Note : 600 and 800 A Controllers require a separate autotransformer with dimensions of 52 x 66 x 46 in. (1321 x 1676 x 1168 mm).

Bulletin 1572 Reduced Voltage Autotransformer Controller Features

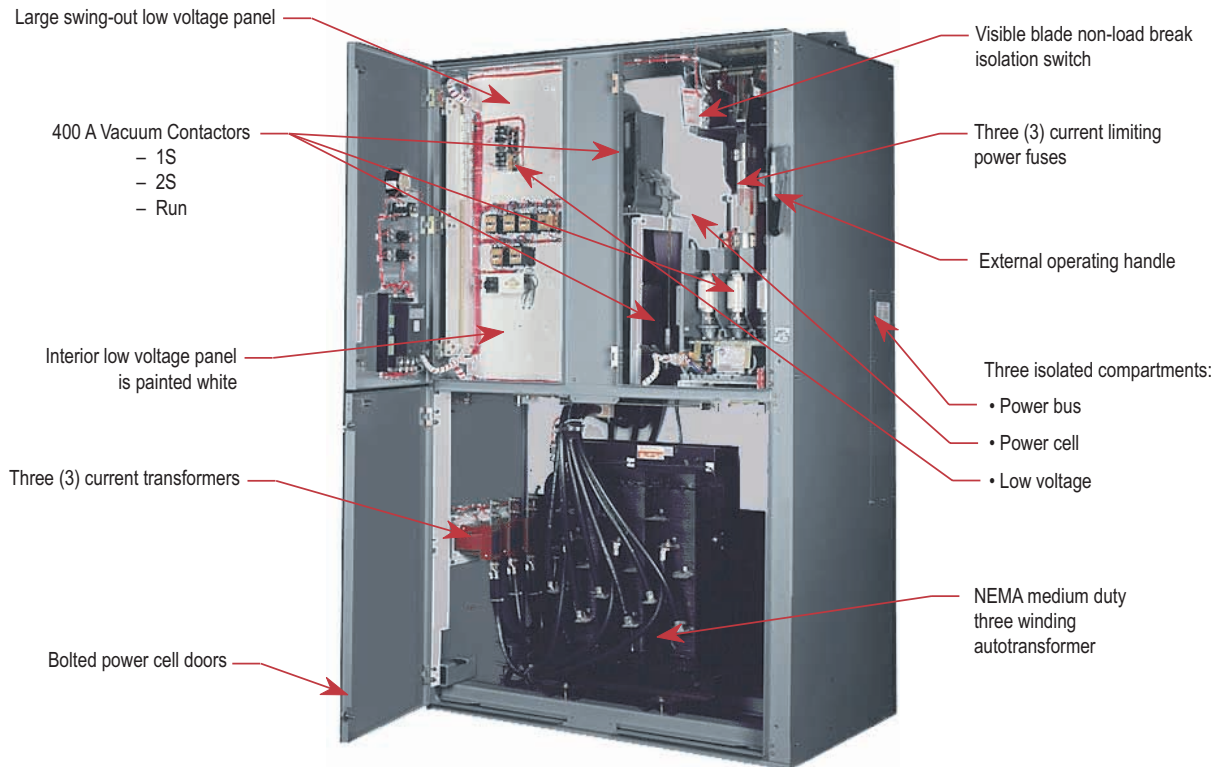

www.rockwellautomation.com

Corporate Headquarters

Rockwell Automation, 777 East Wisconsin Avenue, Suite 1400, Milwaukee, WI, 53202-5302 USA, Tel: (1) 414.212.5200, Fax: (1) 414.212.5201

Headquarters for Allen-Bradley Products, Rockwell Software Products and Global Manufacturing Solutions

Americas: Rockwell Automation, 1201 South Second Street, Milwaukee, WI 53204-2496 USA, Tel: (1) 414.382.2000, Fax: (1) 414.382.4444
 Europe: Rockwell Automation SA/NV, Vorstlaan/Boulevard du Souverain 36-BP 3A/B, 1170 Brussels, Belgium, Tel: (32) 2 663 0600, Fax: (32) 2 663 0640
 Asia Pacific: Rockwell Automation, 27/F Citicorp Centre, 18 Whitfield Road, Causeway Bay, Hong Kong, Tel: (852) 2887 4788, Fax: (852) 2508 1846

Headquarters for Dodge and Reliance Electric Products

Americas: Rockwell Automation, 6040 Ponders Court, Greenville, SC 29615-4617 USA, Tel: (1) 864.297.4800, Fax: (1) 864.281.2433
 Europe: Rockwell Automation, Brühlstraße 22, D-74834 Elztal-Dallau, Germany, Tel: (49) 6261 9410, Fax: (49) 6261 17741
 Asia Pacific: Rockwell Automation, 55 Newton Road, #11-01/02 Revenue House, Singapore 307987, Tel: (65) 351 6723, Fax: (65) 355 1733

Medium Voltage Products, 135 Dundas Street, Cambridge, ON, N1R 5X1 Canada, Tel: (1) 519.623.1810, Fax: (1) 519.623.8930, www.ab.com/mvb