




Application Note

1606-XL240E



- World-wide approvals (  ) for industry, factory mutual rating
- Input: AC 230/115V, DC 240...375V
- Output: 24...28V/240 W

- Power boost up to 288W
- High overload current, no switch-off
- Robust mechanics and EMC

Input

Input voltage	AC 100...120/200...240V (switchable), 47...63Hz (AC 85...132/176...264V, DC 240...375V)
---------------	--

Note: At DC input, always leave the switch in the 230V position

Input current	<6A (switch in 115V position) <2.6A (switch in 230V position)
---------------	--

- DCin at open output 8mA (preserves battery sources)

Inrush current	typ. <30A at AC 264V and cold start
----------------	-------------------------------------

If you intend to protect the primary side of the power supply with a fuse or a circuit breaker, a 10 A slow acting fuse (HBC) or a supplementary protector 1492-SPU1C100 is recommended. In order to meet local requirements, please consult local codes and regulations for proper installation.

Transient handling	Transient resistance acc. to VDE 0160 / W2 (750V/1.3ms), for all load conditions.
--------------------	---

Hold up time	>25ms at AC 196V, 24V/10A (see diagram)
--------------	--

Efficiency, Reliability etc.

Efficiency	typ. 90% (AC 230V, 24V/10A)
------------	-----------------------------

Losses	typ. 26.7W (AC 230V, 24V/10A)
--------	-------------------------------

MTBF	425.000h acc. to Siemensnorm SN 29500 (24V/10A, AC 230V, T _{amb} = +40°C)
------	---

Life cycle (electrolytics)	The unit exclusively uses longlife electrolytics, specified for +105°C.
----------------------------	---

Start / Overload Behavior

Startup delay	typ. 0.1s
---------------	-----------

Rise time	ca. 5...20ms, depending on load
-----------	---------------------------------

- | | |
|---|---|
| Overload Behavior | – no disconnection, no hiccup if overloaded |
| • Special Overload Design (see diagram) | – high overload current (up to 1.6 I _{Nom}), V _{out} is gradually reduced with increasing current. |
| • 20% power boost | – 12A short-term, at 45°C or forced cooling even continuous |

Advantages:

- High short-circuit current, giving large 'start-up window': unit starts reliably even with awkward loads (DC-DC converters, motors).
- No 'sticking' such as can occur with fold-back characteristics
- Secondary fuses operate more reliably

Output

Output voltage	DC 24...28V, adjustable by (covered) front panel potentiometer; preset: 24.5V ±0.5% Adj. range guaranteed
----------------	--

Output noise suppression	Radiated EMI values below EN50081-1, even when using long, unshielded output cables.
--------------------------	--

Ambient temperature range	Operation: 0°C...+70°C (>60°C: Derating) T _{amb} Storage: -40°C...+85°C
---------------------------	---

Humidity	maximum 95%, non-condensing
----------	-----------------------------

Rated continuous loading with convection cooling

- T_{amb}=0°C...60°C 24V/10A (240W) resp. 28V/8.6A (240W)
- T_{amb}=0°C...45°C 24V/12A (288W) resp. 28V/10.3A (288W)
short-term also at 60°C

Output is protected against short-circuit, open circuit and overload

Derating	typ. 6W/K (at T _{amb} = +60°C...+70°C)
----------	---

Voltage regulation	better than 2% V _{out} overall
--------------------	---

Ripple / Noise	<30mV _{pp} , (20MHz bandwidth, 50Ω measurement)
----------------	--

Overvolt. protection	typ. 35V
----------------------	----------

Parallel operation	yes, load sharing available on request
--------------------	--

Power back immunity	34V
---------------------	-----

Front panel indicator	Green LED on front panel
-----------------------	--------------------------

Construction / Mechanics


Housing dimensions and Weight

- W x H x D 120mm x 124mm x 102mm (+ DIN rail)
- Free space for ventilation above/below 25mm recommended
left/right 15mm recommended
- Weight 980g


Design advantages:

- All connection blocks are easy to reach as mounted at the front panel.
- Wire Size Input/Output:
- Stranded 20...10 AWG (0.5...4 mm²), Solid 20...10 AWG (0.5...6 mm²)
- Tightening Torque: 7 lbs in (0.8 Nm) recommended


Efficiency (typ.)

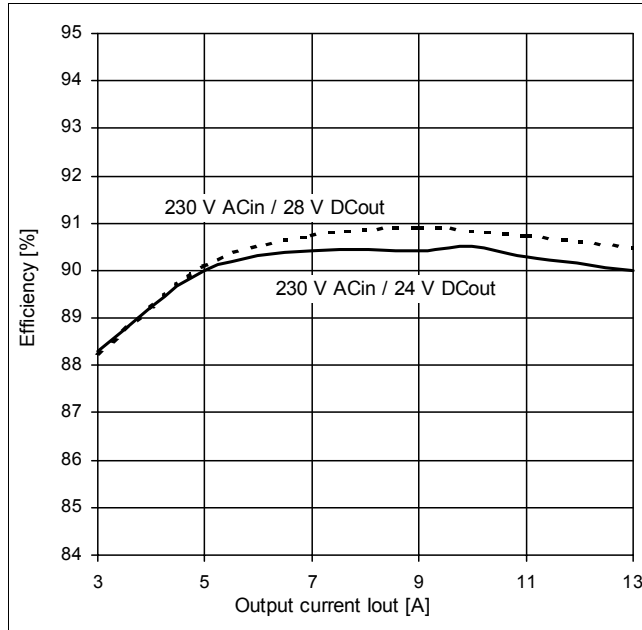

Output characteristic (min.)

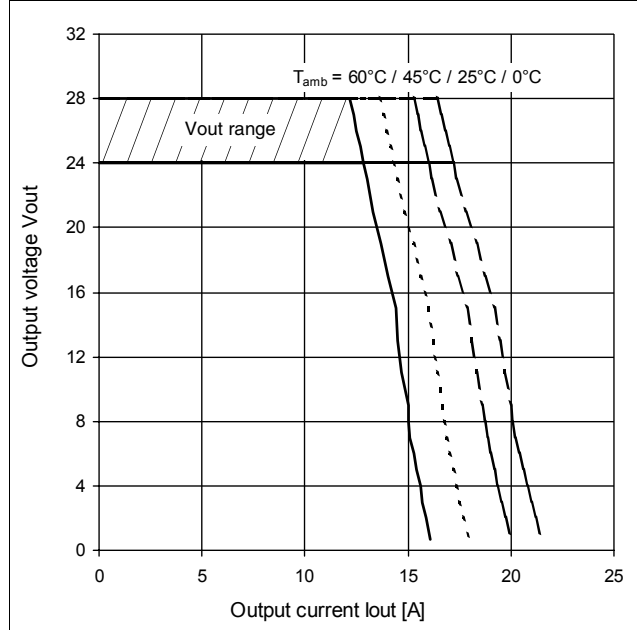

Hold-up time (typ., at V_{out}=24V)

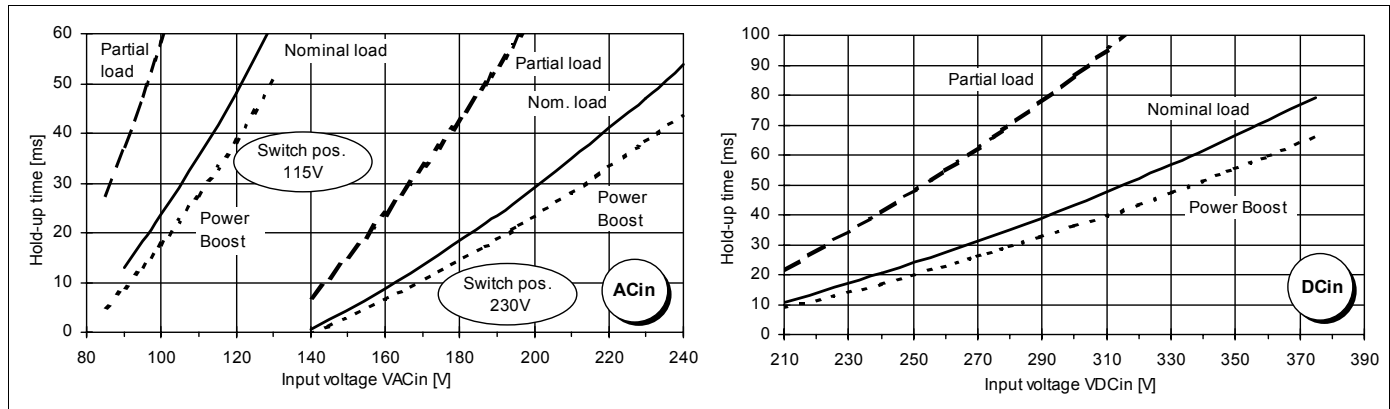

with Partial Load = 120W Nominal Load = 240W Power Boost = 288W

Specifications valid for 230V AC input voltage, +25°C ambient temperature, and 5 min run-in time, unless otherwise stated. They are subject to change without prior notice.

www.rockwellautomation.com

Corporate Headquarters

Rockwell Automation, 777 East Wisconsin Avenue, Suite 1400, Milwaukee, WI, 53202-5302 USA, Tel: (1) 414.212.5200, Fax: (1) 414.212.5201

Headquarters for Allen-Bradley Products, Rockwell Software Products and Global Manufacturing Solutions

Americas: Rockwell Automation, 1201 South Second Street, Milwaukee, WI 53204-2496 USA, Tel: (1) 414.382.2000, Fax: (1) 414.382.4444
 Europe: Rockwell Automation SA/NV, Vorstlaan/Boulevard du Souverain 36-BP 3A/B, 1170 Brussels, Belgium, Tel: (32) 2 663 0600, Fax: (32) 2 663 0640
 Asia Pacific: Rockwell Automation, 27/F Citicorp Centre, 18 Whitfield Road, Causeway Bay, Hong Kong, Tel: (852) 2887 4788, Fax: (852) 2508 1846

Headquarters for Dodge and Reliance Electric Products

Americas: Rockwell Automation, 6040 Ponders Court, Greenville, SC 29615-4617 USA, Tel: (1) 864.297.4800, Fax: (1) 864.281.2433
 Europe: Rockwell Automation, Brühlstraße 22, D-74834 Elztal-Dallau, Germany, Tel: (49) 6261 9410, Fax: (49) 6261 1774
 Asia Pacific: Rockwell Automation, 55 Newton Road, #11-01/02 Revenue House, Singapore 307987, Tel: (65) 351 6723, Fax: (65) 355 1733