

Application Note

1606-XLDNET8



- World-wide approvals (CE UL UL) for industry
- Input: AC 115V/230V, DC 240...375V
- Output: 24V/8 A

- Current limitation at 8 A
- RDY relay contact
- Robust mechanics and EMC

Input

Input voltage	AC100...120/200...240V (switchable), 47...63 Hz (85...132V AC / 176...264V AC, 240...375V DC)
---------------	---

Note: At DC input, always leave the switch in the 230V position.

Input current	5 A (switch in 115V position) 2.3 A (switch in 230V position)
DCin at open output	8 mA (preserves battery sources)
Inrush current	typ. < 30 A at 264V AC and cold start

If you intend to protect the primary side of the power supply with a fuse or a circuit breaker, a 10 A slow acting fuse (HBC) or a supplementary protector 1492-SPU1C100 is recommended. In order to meet local requirements, please consult local codes and regulations for proper installation.

Transient handling	Transient resistance acc. to VDE 0160 / W2 (750 V / 1.3 ms), for <i>all</i> load conditions.
--------------------	--

Hold-up time	> 30 ms at 196VAC, 24V/8 A (see diagram)
--------------	--

Efficiency, Reliability etc.

Efficiency	typ. 90 % (230V AC, 24V/8 A)
Losses	typ. 21.3 W (230VAC, 24V/8 A)
MTBF	390.000 h acc. to Siemensnorm SN 29500 (24V/8 A, 230VAC, $T_{\text{amb}} = +40^\circ\text{C}$)

Life cycle (electrolytics)	The unit exclusively uses longlife electrolytics specified for +105°C.
----------------------------	--

Start / Overload Behavior

Start-up delay	typ. 0.1 s
Rise time	ca. 5...20 ms, depending on load

Overload Behavior:

- No disconnection, no hiccup if overloaded
- Current limited to 8 A
- Iout (8 A) continuously delivered up to +70°C
- No 'sticking' such as can occur with fold-back characteristics

Output

Rated output voltage	24V DC $\pm 0.5\%$
Output noise suppression	Radiated EMI values below EN50081-1, even when using long, unscreened output cables.

Ambient temperature range	Operation: 0°C...+70°C T_{amb} Storage: -25°C...+85°C
---------------------------	---

Rated continuous loading with convection cooling	• $T_{\text{amb}} = 0^\circ\text{C} \dots 70^\circ\text{C}$ 24V/8 A
--	---

Output is protected against short circuit, open circuit and overload

Voltage regulation	better than 2% V_{out} overall
Ripple / Noise	< 30 mV _{pp} , (20 MHz bandwidth, 50 Ω measurement)
Overvolt. protection	typ. 35V
Parallel operation	yes, current sharing on request
Front panel indicator	Green LED

RDY relay contact

- Type normally open contact
- closes when output voltage > 22.1V $\pm 4\%$
- opens when output voltage < 19.8V $\pm 4\%$
- Electrical isolation 500V DC to output voltage
- Contact rating 1A at 28V DC

Construction / Mechanics


Housing dimensions and Weight

- W x H x D 120 mm x 124 mm x 102 mm (+ DIN Rail)
- Free space for ventilation above/below 25 mm recommended left/right 15 mm recommended
- Weight 980 g


Design advantages:

- Input and output pluggable by means of Combicon[®] plug connector
- Wire Size Input/Output Stranded 22...12 AWG (0.2...2.5 mm²), Solid 22...12 AWG (0.2...2.5 mm²)
- Tightening Torque 3.5 lbs in (0.4 Nm) recommended (pluggable)


Efficiency (typ.)

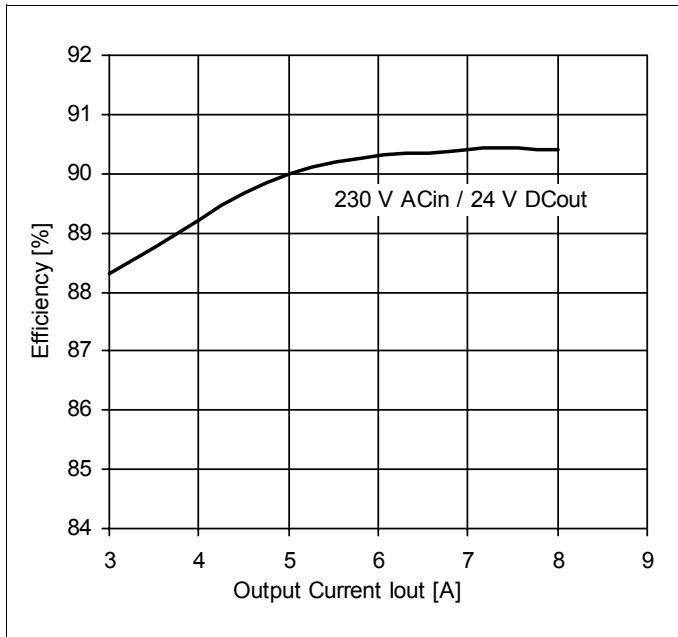

Output characteristic (typ.)

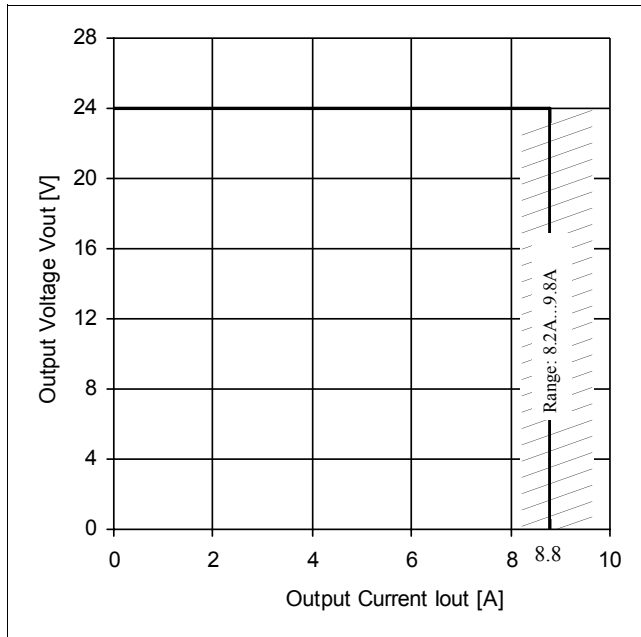

Hold-up time (typ., at V_{out}=24V)

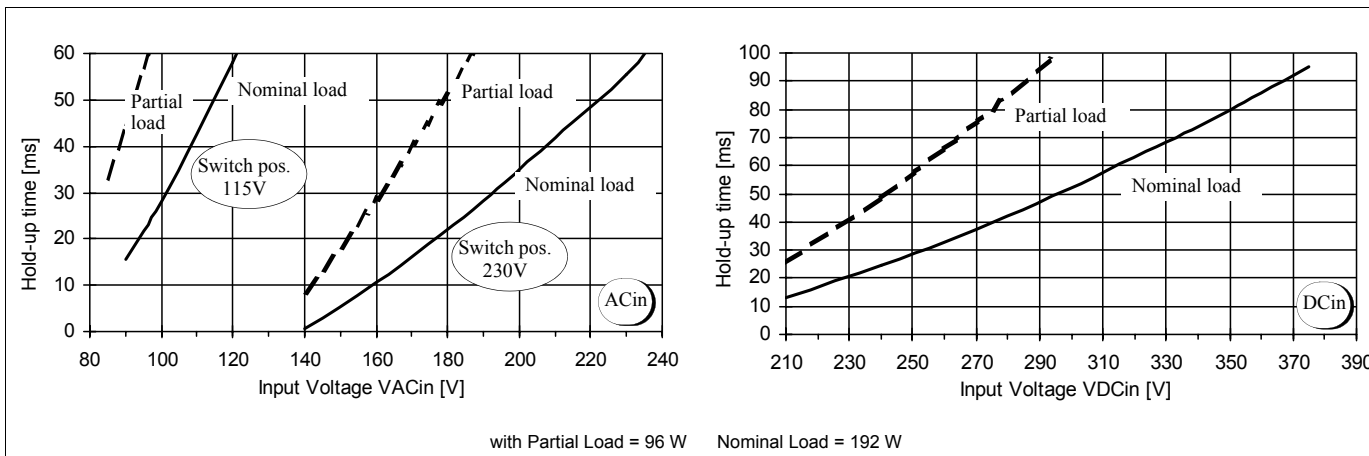

www.rockwellautomation.com

Specifications valid for 230V AC input voltage, +25°C ambient temperature, and 5 min run-in time, unless otherwise stated. They are subject to change without prior notice

Corporate Headquarters

Rockwell Automation, 777 East Wisconsin Avenue, Suite 1400, Milwaukee, WI, 53202-5302 USA, Tel: (1) 414.212.5200, Fax: (1) 414.212.5201

Headquarters for Allen-Bradley Products, Rockwell Software Products and Global Manufacturing Solutions

Americas: Rockwell Automation, 1201 South Second Street, Milwaukee, WI 53204-2496 USA, Tel: (1) 414.382.2000, Fax: (1) 414.382.4444
 Europe: Rockwell Automation SA/NV, Vorstlaan/Boulevard du Souverain 36-BP 3A/B, 1170 Brussels, Belgium, Tel: (32) 2 663 0600, Fax: (32) 2 663 0640
 Asia Pacific: Rockwell Automation, 27/F Citicorp Centre, 18 Whitfield Road, Causeway Bay, Hong Kong, Tel: (852) 2887 4788, Fax: (852) 2508 1846

Headquarters for Dodge and Reliance Electric Products

Americas: Rockwell Automation, 6040 Ponders Court, Greenville, SC 29615-4617 USA, Tel: (1) 864.297.4800, Fax: (1) 864.281.2433
 Europe: Rockwell Automation, Brühlstraße 22, D-74834 Elztal-Dallau, Germany, Tel: (49) 6261 9410, Fax: (49) 6261 1774
 Asia Pacific: Rockwell Automation, 55 Newton Road, #11-01/02 Revenue House, Singapore 307987, Tel: (65) 351 6723, Fax: (65) 355 1733