




Allen-Bradley Input/Output Simulation Module

(Cat. No. 1771-SIM)


Product Data

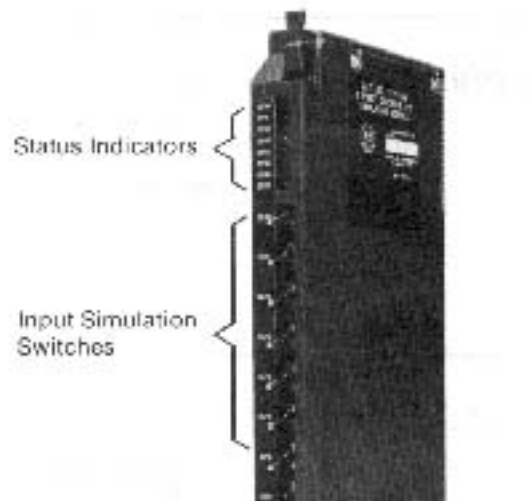

Description

The 1771-SIM Module is an input simulation and output indicating module. It can be inserted into any 1771 Universal I/O chassis.

The switches on this single-slot module simulate open/close devices; the LED's identify which outputs are active.

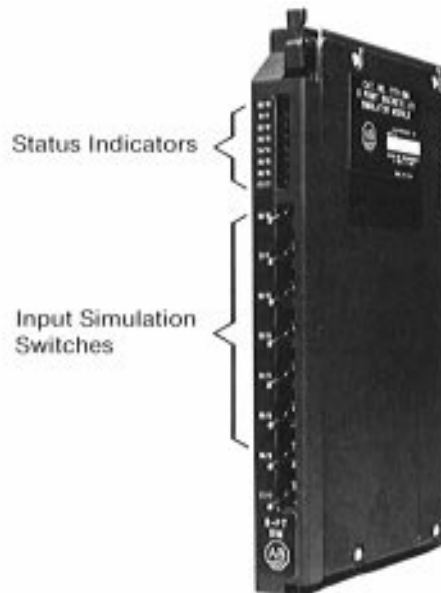

Uses

Typical uses include:

- Testing programs for proper response to a specified input.
- Testing programs for sending “turn on/turn off” signals to user-defined outputs.
- Replacing manual input devices such as temporary switch-and-wire setups; has eight switches, one for each input.
- Replacing temporary output test lamps; has eight built-in LEDs, one for each output.

Connections

All connections and power to the 1771-SIM module are through its backplane connector; therefore, no user-accessible terminals are provided.

Addressing

The module can be inserted into and addressed¹ in either high byte slots or low byte slots.

INPUT: Each switch can be addressed¹ as either a low byte slot device (00-07₈) or a high byte slot device (10-17₈).

OUTPUT: Each output indicator can be addressed¹ at either a low byte slot address (00-07₈) or at a high byte slot address (10-17₈).

Backplane Power

The logic circuitry and the LEDs of the Simulation Module are powered by the I/O chassis power supply. The module requires +5V DC at a maximum of 300 mA. Add the current requirements of the module into the total of the other modules in the I/O chassis to check current limits. Do not overload the supply or the I/O chassis backplane.

Specifications

I/O per module:

- 8 input simulating switches
- 8 output indicators

Backplane Current:

- 300mA @ +5V DC

Slot locations:

- lower or upper byte
(Slot 0 or 1)

Environmental conditions:

- Operating Temperature:
0 to 60°C (32 to 140°F)
- Storage Temperature:
-40 to 85°C (-40 to 185°F)
- Relative Humidity:
5 to 95% (non-condensing)

Keying:

- between 14 and 16, 24 and 26.

NOTE: Check for existing keys before installing the 1771-SIM module.

¹When installed in the appropriate slot.



ALLEN-BRADLEY
A ROCKWELL INTERNATIONAL COMPANY

As a subsidiary of Rockwell International, one of the world's largest technology companies — Allen-Bradley meets today's challenges of industrial automation with over 85 years of practical plant-floor experience. More than 11,000 employees throughout the world design, manufacture and apply a wide range of control and automation products and supporting services to help our customers continuously improve quality, productivity and time to market. These products and services not only control individual machines but integrate the manufacturing process, while providing access to vital plant floor data that can be used to support decision-making throughout the enterprise.

With offices in major cities worldwide

**WORLD
HEADQUARTERS**

Allen-Bradley
1201 South Second Street
Milwaukee, WI 53204 USA
Tel: (1) 414 382-2000
Telex: 43 11 016
FAX: (1) 414 382-4444

**EUROPE/MIDDLE
EAST/AFRICA
HEADQUARTERS**

Allen-Bradley Europe B.V.
Amsterdamseweg 15
1422 AC Uithoorn
The Netherlands
Tel: (31) 2975/43500
Telex: (844) 18042
FAX: (31) 2975/60222

**ASIA/PACIFIC
HEADQUARTERS**

Allen-Bradley (Hong Kong)
Limited
Room 1006, Block B, Sea
View Estate
28 Watson Road
Hong Kong
Tel: (852) 887-4788
Telex: (780) 64347
FAX: (852) 510-9436

**CANADA
HEADQUARTERS**

Allen-Bradley Canada
Limited
135 Dundas Street
Cambridge, Ontario N1R
5X1
Canada
Tel: (1) 519 623-1810
FAX: (1) 519 623-8930

**LATIN AMERICA
HEADQUARTERS**

Allen-Bradley
1201 South Second Street
Milwaukee, WI 53204 USA
Tel: (1) 414 382-2000
Telex: 43 11 016
FAX: (1) 414 382-2400