


Serial Communication Cables

Catalog Numbers 2090-CCMPCDS, 2090-CCMCNDS, 2090-CCMDSDS

Serial Communication Cables

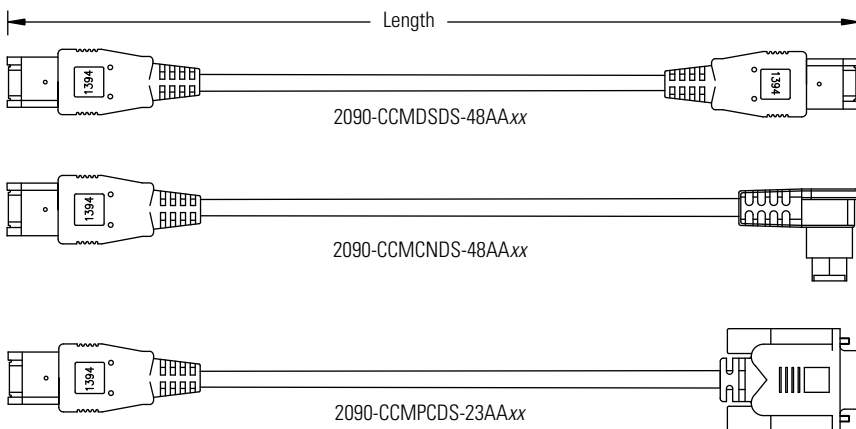

Cat. No.	Length m (ft)	Connection
2090-CCMDSDS-48AA01	1.0 (3.28) ⁽¹⁾	Drive to drive
2090-CCMDSDS-48AAP3	0.3 (0.98) ⁽¹⁾	
2090-CCMCNDS-48AA01	1.0 (3.28) ⁽¹⁾	Drive to MicroLogix controller
2090-CCMCNDS-48AA03	3.0 (9.84) ⁽²⁾	
2090-CCMPCDS-23AA01	1.0 (3.28) ⁽¹⁾	Drive to personal computer
2090-CCMPCDS-23AA03	3.0 (9.84) ⁽²⁾	


(1) Tolerance is ± 30 mm (1.18 in.).

(2) Tolerance is ± 50 mm (1.97 in.).

Cable Specifications

Attribute	Value
Diameter	5.5 mm (0.22 in.)
Bend radius	55 mm (2.2 in.)

Schematic and Connector Pinouts

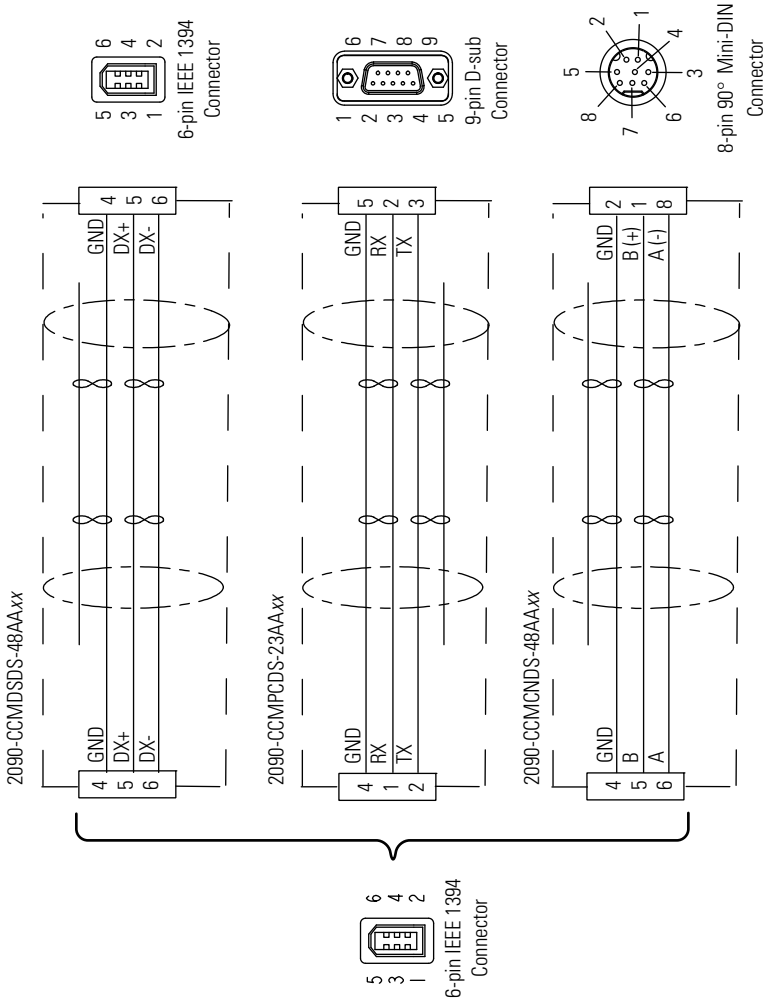

Allen-Bradley, Rockwell Software, and Rockwell Automation are trademarks of Rockwell Automation, Inc.

Trademarks not belonging to Rockwell Automation are property of their respective companies.

Rockwell Otomasyon Ticaret A.Ş., Kar Plaza İş Merkezi E Blok Kat:6 34752 İçerenköy, İstanbul, Tel: +90 (216) 5698400

www.rockwellautomation.com

Power, Control and Information Solutions Headquarters

Americas: Rockwell Automation, 1201 South Second Street, Milwaukee, WI 53204-2496 USA, Tel: (1) 414.382.2000, Fax: (1) 414.382.4444

Europe/Middle East/Africa: Rockwell Automation NV, Pegasus Park, De Kleetlaan 12a, 1831 Diegem, Belgium, Tel: (32) 2 663 0600, Fax: (32) 2 663 0640

Asia Pacific: Rockwell Automation, Level 14, Core F, Cyberport 3, 100 Cyberport Road, Hong Kong, Tel: (852) 2887 4788, Fax: (852) 2508 1846