


NOTES


1 REMOTE DEVICE

2



SPEED	LINES			OPEN	TOGETHER		
	L1	L2	L3				
LOW FOR.	T1	T2	T3	T4	T5	T6	NONE
HIGH FOR.	T6	T4	T5	NONE	T1	T2	T3
LOW REV.	T3	T2	T1	T4	T5	T6	NONE

THIS IS AN EXTERNAL CIRCUIT BREAKER AUXILIARY AND SHOULD NOT BE USED FOR BREAKER TRIP INDICATION.

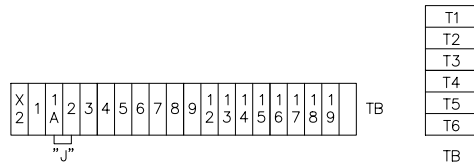

THE CIRCUIT IS TYPICAL OF A SIZE 1-2 BUL 2127K TSR1W STARTER WITH 120 VOLT SEPARATE CONTROL
 OPTIONS:
 - 1 CONTROL CIRCUIT FUSE
 - 1 SURGE SUPPRESSOR ON EACH STARTER COIL
 - 1 N.O. AUXILIARY CONTACT ON THE CIRCUIT BREAKER

A COMPLETE AND ACCURATE REPRESENTATION OF THE CIRCUIT DEPENDS ON THE SIZE AND OPTIONS ORDERED.

References		BUL. 2127K SIZE 1-2		 Rockwell Automation
Revision		TYPE B		
Release	Dimensions Apply Before Surface Treatment	Tolerances Unless Otherwise Specified		Dr. _____ Date _____ Chkd. _____ Date _____ Appd. _____ Date _____
1 09/05/01	2. Place Decimal ± .02	3. Place Decimal ± .005		
	Angles ± 1			
Refer. Book				
Sheet 1 Of 1			Dwg Size C	2127KW003