


NOTES

INTERNAL CB DEVICES
SUPPLIED WITH UNMOUNTED
CONNECTION BLOCKS.

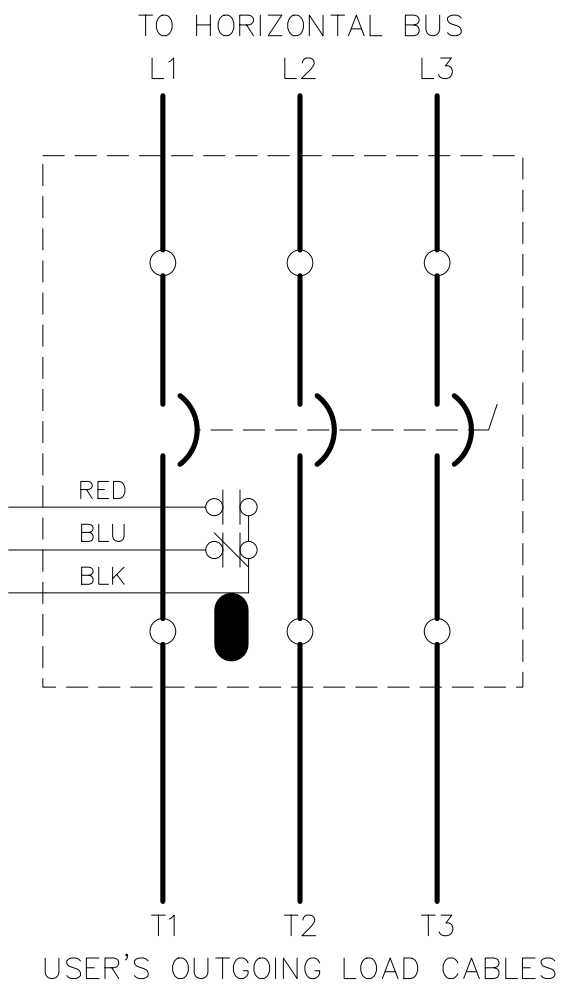

THE CIRCUIT IS TYPICAL OF A 150A BUL 2193F CIRCUIT BREAKER FEEDER UNIT
OPTIONS:
 - 1 N.O. INTERNAL AUXILIARY CONTACT IN THE CIRCUIT BREAKER
 - 1 N.C. INTERNAL AUXILIARY CONTACT IN THE CIRCUIT BREAKER

A COMPLETE AND ACCURATE REPRESENTATION OF THE CIRCUIT DEPENDS ON THE
SIZE AND OPTIONS ORDERED.

References		BUL. 2193F		Allen-Bradley Rockwell Automation
Revision		150 AMP "F" FRAME		
1	06/23/01			
Dimensions Apply Before Surface Treatment Dimensions in Inches Tolerances Unless Otherwise Specified 2 Place Decimal ±.02 3 Place Decimal ±.005 Angles ± 1		Dr.	Date	Sheet 1 Of 1
Refer. Book		Chkd.	Date	Dwg Size A
		Appd.	Date	2193FWB005