
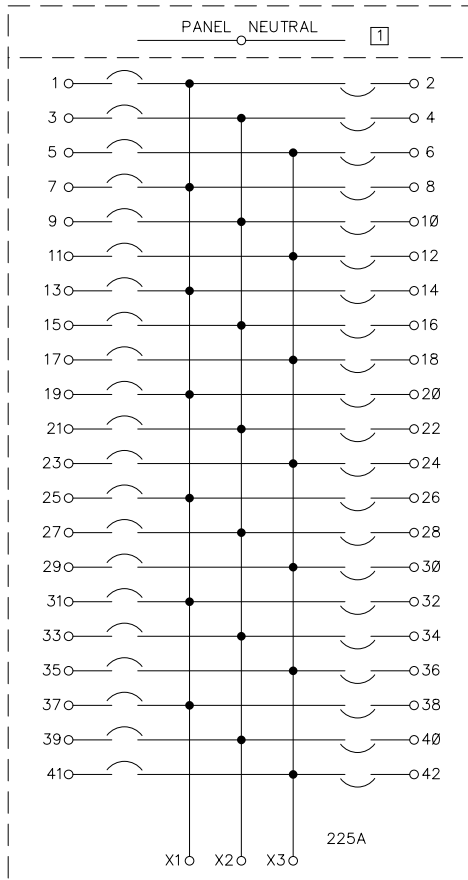


A [1] OTHER SIDE OF EACH CIRCUIT IS ALSO CONNECTED TO PANEL NEUTRAL.

LIGHTING PANEL SUPPLIED WITH:
 18 - 15A. - 1 POLE BREAKER(S)
 8 - 15A. - 3 POLE BREAKER(S)

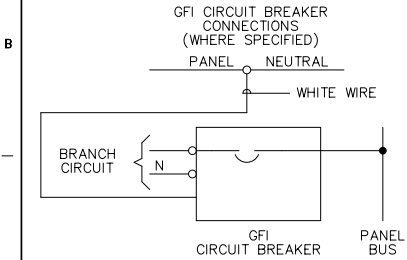

THIS LAYOUT IS TYPICAL OF A BUL 2193LE THREE PHASE, 4 WIRE, LIGHTING PANEL WITH 225A MAIN LUG. ACTUAL LOCATION OF BRANCH BREAKERS IS DETERMINED BY MANUFACTURING.

- IT CONTAINS:
- 18 1-POLE 15A BRANCH BREAKERS
 - 8 3-POLE 15A BRANCH BREAKERS

References		BUL. 2193LE 3-PHASE		
Revision		LIGHTING PANEL		
1	08/28/01	Dimensions Apply Before Surface Treatment		Sheet 1 Of 1
		Dimensions in Inches Tolerances Unless Otherwise Specified		Dwg Size C
		2 Place Decimal ± .02	Dr.	Date
		3 Place Decimal ± .005	Chkd.	Date
		Angles ± 1	Appd.	Date
Refer. Book				2193LEWB004