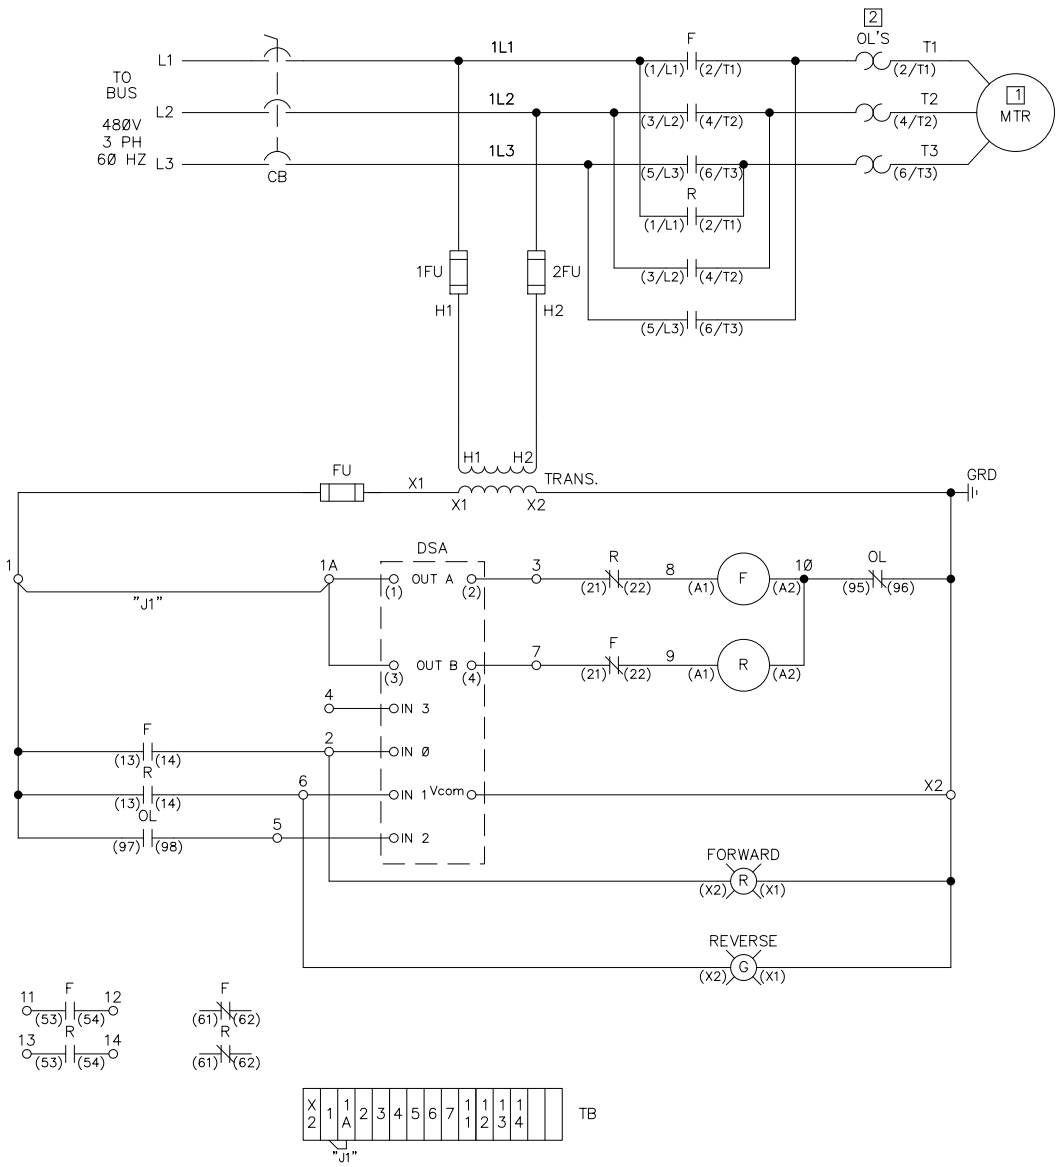

THE CIRCUIT IS TYPICAL OF A 16 AMP BUL 2407 FVR STARTER WITH TRANSFORMER CONTROL OPTIONS:

- A 480/120V CONTROL TRANSFORMER WITH PRIMARY FUSES
- 1 'FORWARD' PILOT LIGHT (RED)
- 1 'REVERSE' PILOT LIGHT (GREEN)
- 1 DeviceNET STARTER AUXILIARY MODULE WITH 120V INPUTS AND OUTPUTS
- 1 N.O. AUXILIARY CONTACT ON EACH STARTER
- 1 N.C. AUXILIARY CONTACT ON EACH STARTER

A COMPLETE AND ACCURATE REPRESENTATION OF THE CIRCUIT DEPENDS ON THE SIZE AND OPTIONS ORDERED.

NOTES

[1] REMOTE DEVICE

[2] DO NOT USE AUTOMATIC RESET MODE IN APPLICATIONS WHERE UNEXPECTED AUTOMATIC RESTART OF THE MOTOR CAN CAUSE INJURY TO PERSONS OR DAMAGE TO EQUIPMENT.

References			BUL. 2407 16 AMP		Allen-Bradley Rockwell Automation
Revision		Dimensions Apply Before Surface Treatment	TYPE B		
	Release	Dimensions in Inches Tolerances Unless Otherwise Specified			
1	08/28/01	2 Place Decimal ±.02			Sheet 1 Of 1
		3 Place Decimal ±.005	Dr.	Date	
		Angles ±1	Chkd.	Date	Dwg Size C 2407WB015
Refer. Book			Appd.	Date	

P.C.P. AutoCAD

Allen-Bradley Drives