

Patchcords, M23 Style

Male to Female, 12-Pin



12-Pin Male to Female M23 Patchcord


Specifications

Coupling Nut	Nickel-plated brass
Connector	Molded oil-resistant PUR
Contacts	Gold-plated palladium/nickel
Cable Approvals	Oil resistant yellow PVC jacket, 18AWG conductors, 60V UL recognized and CSA certified
Cable O.D.	10mm (0.41 in)
Enclosure Rating	IP67, NEMA 6P
Temperature	-20°C to +80°C (-4°F to +176°F)

Features


- 12-pin configuration for SafeShield light curtains and other applications
- Highly visible yellow PVC jacket offers good oil and chemical resistance

Dimensions—mm (in)

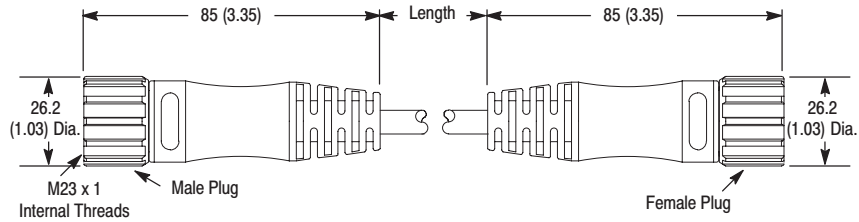

Dimensions are approximate. Illustrations are not drawn to scale.

Product Selection



Female Connector (Sensor End)		Cable		Male Connector		Catalog Number
Face View of Female	Connector Style	Wire Rating	Length—m (ft)	Face View of Male	Connector Style	
	Straight	18AWG 300V 4A	0.3 (1)		Straight	889M-F12AHMU-0M3
			0.6 (2)			889M-F12AHMU-0M6
			1 (3.3)			889M-F12AHMU-1
			2 (6.5)			889M-F12AHMU-2
			3 (9.8)			889M-F12AHMU-3