

Cordsets, EAC Micro Style



4-Pin EAC Micro Cordset


Specifications

Coupling Nut	Epoxy coated zinc
Connector	Molded oil-resistant polyurethane body
Contacts	Gold over nickel-plated brass
Cable	Yellow oil-resistant PVC jacket, 22AWG conductors, 300V, UL recognized and CSA certified
Cable O.D.	5mm (0.21in)
Temperature	-20°C to +105°C (-4°F to +221°F)

Features

- UL recognized and CSA certified
- Ratcheting coupling nut
- Highly visible yellow PVC jacket offers good oil and chemical resistance


Dimensions—mm (in)

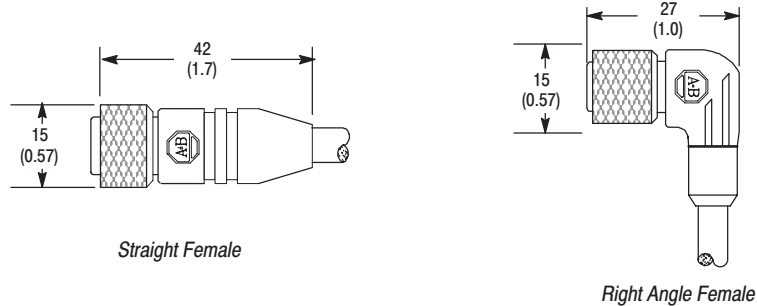

Straight Female

Right Angle Female

Product Selection



Dimensions are approximate. Illustrations are not drawn to scale.

Female Connector (Sensor End)		Cable			Catalog Number
Face View of Female	Connector Style	Wire Color	Wire Rating	Length—m (ft)	
	Straight	1 Brown 2 Blue 3 Not Used 4 Green/Yellow	22AWG 300V 3A	2 (6.5)	889B-F3AC-2
				5 (16.4)	889B-F3AC-5
				10 (32.8)	889B-F3AC-10
	Right Angle	1 Brown 2 Blue 3 Black 4 Green/Yellow		2 (6.5)	889B-R3AC-2
				5 (16.4)	889B-R3AC-5
				10 (32.8)	889B-R3AC-10
	Straight	1 Brown 2 Blue 3 Black 4 Green/Yellow	2 (6.5)	889B-F4AC-2	
			5 (16.4)	889B-F4AC-5	
			10 (32.8)	889B-F4AC-10	
	Right Angle	1 Brown 2 Blue 3 Black 4 Green/Yellow	2 (6.5)	889B-R4AC-2	
			5 (16.4)	889B-R4AC-5	
			10 (32.8)	889B-R4AC-10	