




EAC Micro Male Receptacle

**Specifications**

<b>Receptacle Shell</b>	Black anodized machined aluminum
<b>Connector Insert</b>	Nylon
<b>Contacts</b>	Machined brass with gold over nickel plating
<b>Wire Insulation</b>	Oil-resistant PVC, 22AWG stranded copper, 300V, UL recognized and CSA certified
<b>Temperature</b>	-20°C to +105°C (-4°F to +221°F)


**Dimensions—mm (in)**

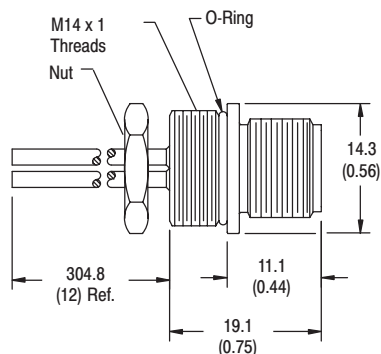

**Features**

- 22AWG conductors
- Male bulkhead receptacles
- 3- or 4-wire configuration
- M14 x 1 threads
- UL recognized and CSA certified

**Product Selection**



Face View of Male	Wire Color	Wire Rating	Length—m (ft)	Panel Mount Threads	Catalog Number
	1 Brown 2 Blue 3 Not Used 4 Green/Yellow	22AWG 300V 3A	0.3 (1)	M14 x 1	888B-M3AC6-OM3
	1 Brown 2 Blue 3 Black 4 Green/Yellow				888B-M4AC6-OM3