




### Specifications

<b>Coupling Nut</b>	Nickel-plated brass
<b>Connector</b>	Molded TPE
<b>Contacts</b>	Gold-plated palladium/nickel
<b>Cable</b>	Oil-resistant yellow PVC jacket, 24AWG conductors, 300V, UL recognized, CSA certified
<b>Cable O.D.</b>	3/c = 4.3mm (0.17in) 4/c = 4.6mm (0.18in)
<b>Enclosure Rating</b>	IP67, NEMA 6P
<b>Temperature</b>	-20° C to +105° C (-4° F to +221° F)

### Features

- Highly visible yellow PVC jacket offers good oil and chemical resistance
- Screw-on coupling nut for rugged reliable connection
- Ratcheting coupling nuts for vibration resistance


### Dimensions—mm (in)

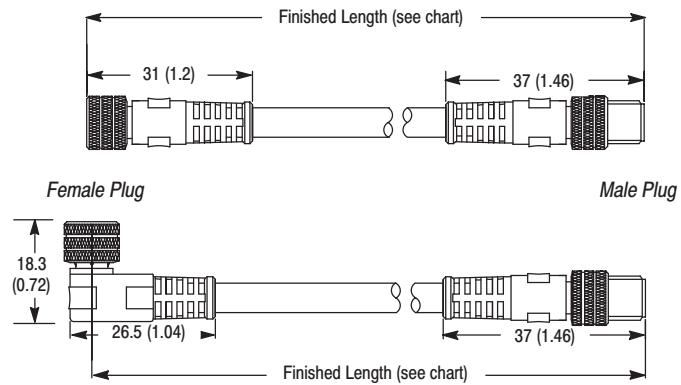

Dimensions are approximate. Illustrations are not drawn to scale.

# Patchcords, Pico Style

## Pico Male to Pico Female



### Product Selection

Female Connector (Sensor End)		Cable		Male Connector (I/O End)		Catalog Number
Face View of Female	Connector Style	Wire Rating	Length—m (ft)	Face View of Male	Connector Style	
	Straight	24AWG 60V AC/75V DC 4A	1 (3.3)		Straight	889P-F3ABPM-1
			2 (6.5)			889P-F3ABPM-2
			3 (9.8)			889P-F3ABPM-3
			5 (16.4)			889P-F3ABPM-5
			10 (32.8)			889P-F3ABPM-10
	Right Angle		1 (3.3)			889P-R3ABPM-1
			2 (6.5)			889P-R3ABPM-2
			3 (9.8)			889P-R3ABPM-3
			5 (16.4)			889P-R3ABPM-5
			10 (32.8)			889P-R3ABPM-10
	Straight	24AWG 60V AC/75V DC 4A	1 (3.3)		Straight	889P-F4ABPM3-1
			2 (6.5)			889P-F4ABPM3-2
			3 (9.8)			889P-F4ABPM3-3
			5 (16.4)			889P-F4ABPM3-5
			10 (32.8)			889P-F4ABPM3-10
	Right Angle		1 (3.3)			889P-R4ABPM3-1
			2 (6.5)			889P-R4ABPM3-2
			3 (9.8)			889P-R4ABPM3-3
			5 (16.4)			889P-R4ABPM3-5
			10 (32.8)			889P-R4ABPM3-10
	Straight	24AWG 60V AC/75V DC 4A	1 (3.3)		Straight	889P-F4ABPM-1
			2 (6.5)			889P-F4ABPM-2
			3 (9.8)			889P-F4ABPM-3
			5 (16.4)			889P-F4ABPM-5
			10 (32.8)			889P-F4ABPM-10

Note: PUR cable models also available (example: 889P-F3UBPM-1).



DC Micro to Pico Patchcord

**Specifications**


<b>Coupling Nut</b>	Epoxy-Coated Zinc
<b>Connector</b>	Molded oil-resistant PVC
<b>Contacts</b>	Gold-plated palladium/nickel
<b>Cable</b>	Oil-resistant yellow PVC jacket, 22AWG conductors, 300V, UL recognized and CSA certified
<b>Cable O.D.</b>	4.3mm (0.17in)
<b>Temperature</b>	-20°C to +105°C (-4°F to +221°F)

**Features**

- Highly visible yellow PVC jacket offers good oil and chemical resistance
- Convenient connection from pico to DC micro
- Ratcheting coupling nut for vibration resistance

- |                   |                     |
|-------------------|---------------------|
| 3-Pin Pico Female | 4-Pin DC Micro Male |
| Pin 1 >           | >Pin 1              |
| Pin 3 >           | >Pin 3              |
| Pin 4 >           | >Pin 4              |
| 4-Pin Pico Female | 4-Pin DC Micro Male |
| Pin 1 >           | >Pin 1              |
| Pin 2 >           | >Pin 2              |
| Pin 3 >           | >Pin 3              |
| Pin 4 >           | >Pin 4              |


**Dimensions—mm (in)**

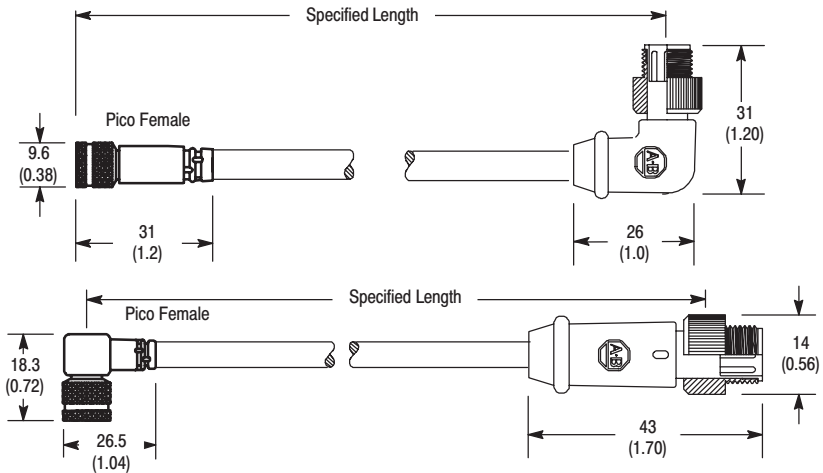

Dimensions are approximate. Illustrations are not drawn to scale.

# Patchcords, Pico Style

## DC Micro Male to Pico Female



### Product Selection—Pico to DC Micro Patchcords

Female Connector (Sensor End)		Cable		Male Connector (Male Coupling Nut)		Catalog Number
Face View of Female	Connector Style	Wire Rating	Length—m (ft)	Face View of Male	Connector Style	
	Straight	24AWG 60V AC/ 75V DC 3A	1 (3.3)		Straight	889P-F3ABDM4-1
			2 (6.5)			889P-F3ABDM4-2
			5 (16.4)			889P-F3ABDM4-5
			10 (32.8)			889P-F3ABDM4-10
	Right Angle		1 (3.3)			889P-R3ABDM4-1
			2 (6.5)			889P-R3ABDM4-2
			5 (16.4)			889P-R3ABDM4-5
			10 (32.8)			889P-R3ABDM4-10
	Straight		1 (3.3)		889P-F3ABDE4-1	
			2 (6.5)			889P-F3ABDE4-2
			5 (16.4)			889P-F3ABDE4-5
			10 (32.8)			889P-F3ABDE4-10
	Right Angle		1 (3.3)			889P-R3ABDE4-1
			2 (6.5)			889P-R3ABDE4-2
			5 (16.4)			889P-R3ABDE4-5
			10 (32.8)			889P-R3ABDE4-10
	Straight	1 (3.3)		Straight	889P-F4ABDM-1	
		2 (6.5)			889P-F4ABDM-2	
		5 (16.4)			889P-F4ABDM-5	
		10 (32.8)			889P-F4ABDM-10	
		Right Angle			1 (3.3)	889P-F4ABDE-1
					2 (6.5)	889P-F4ABDE-2
				5 (16.4)	889P-F4ABDE-5	
				10 (32.8)	889P-F4ABDE-10	