



Allen-Bradley I/O Scanner-Communication Adapter Module (Cat. No. 1775-S5, -SR5)

Use This Document With

PLC-3 Family I/O Scanner Communication-Adapter Module User's Manual, publication 1775-6.5.5 - December 1987. This documentation update amends and supplements the above publication and applies to series A, revision D scanners. Keep this update with your manual.

Using a Data Highway Plus

You can use the 1775-S5, -SR5 scanners to connect a PLC-3 or PLC-3/10 controller to a Data Highway Plus communication link. The user's manual refers to the Data Highway Plus communication link as the Peer-Communication-Link (PCL).

DH/DH+ Status Indicators

On page 2-4 replace the last line of the last table on the page with this:

LED	Color	Meaning when on
DIS	yellow	DH/DH+ connectors are disabled or duplicate DH+ station address


Setting the Thumbwheel and Dip Switches

On page 2-7 remove (LSB) and (MSB) from the first paragraph on the page.

Allen-Bradley Replacements

On page 2-8 replace figure 2.5 with this figure:

**Figure 2.5
Setting Backup System Functions**

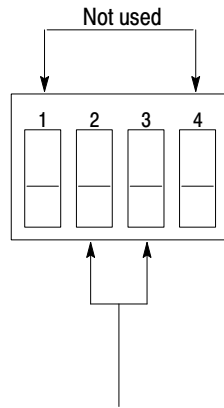

Switch Positions:
DOWN = Switch is toward board
UP = Switch is away from board

If you are operating a backup system, then set these switches to set up the type of switchover.

Switchover Type	Switch		System (primary) or backup
	2	3	
Auto with controllable switchback	down	up	both
Auto with no switchback	down up	up up	primary backup
Manual	up	down	both

If you are not operating a backup system, then set switches 2 and 3 to the UP position

15424

Inserting the Scanner

On page 2-9 replace the **CAUTION** at the bottom of the page with this:

CAUTION: You can replace a 1775-S4A, -SR scanner with a 1775-S5, -SR5 scanner; however, you must first clear memory before replacing one scanner with another. You must also select auto configure for each 1775-S5, -SR5 scanner communication channel in LIST. Failure to observe this caution could result in equipment damage and/or undesired machine operation.

Connecting to a Backup System

On page 2-10 replace the first bullet of the **CAUTION** with this:

- Do not connect a 1775-S5, -SR5 scanner to a 1775-S4A, -S4B, or -SR scanner.

On page 2-14 remove the **CAUTION**.

I/O Scan Configuration

On page 3-7 replace the **WARNING** at the bottom of the page with this:

WARNING: Do not assign the same I/O rack number and I/O group number to two chassis on the same I/O communication channel. Failure to observe this warning could result in equipment damage and/or undesired operation with personal injury.

Data Highway or DH+ Configuration

On page 3-10 replace the eight bulleted items after the first paragraph with this:

- node mode
- station number
- timeout
- communication channel back up
- send unprotected
- accept upload/download
- accept writes
- input file list
- privileges
- DH/DH+ switch settings
- DH+ active node list

Connecting to the I/O Channel Terminal Arm

When configuring channel four for a communication protocol, the menu contains these selections:

```
S5    1-CHAN 4
      1 NODE MODE      *ON-LINE    OFF-LINE
      2 STATION NUMBER:    23 SELECTED  255 ACTUAL
      3 DH/DH+ TIMEOUTS
      4 *COMMUNICATION CHANNEL BACKED UP
      5 *SEND UNPROTECTED
      6 *ACCEPT UPLOAD/DOWNLOAD
      7 *ACCEPT WRITES
      8 INPUT FILE LIST
      9 PRIVILEGES
     10 DH/DH+ SWITCH SETTINGS
     11 DH+ ACTIVE NODE LIST
      ENTER NEXT>
```

Station Number

On page 3-10 add this at the end of the page:

This line may show two values for the station number: selected and actual. Both numbers display if they are different and during these two situations:

- You changed the station number in line 2 but have not executed a reconfigure to change the actual station number to the new number.
 - The scanner in a backed up system assumes an address different from the primary scanner until switchover occurs.
-

Timeouts

On page 3-11 add this immediately before the first paragraph of text:

By selecting option three, you can set these timeout values in seconds:

- outgoing message
- LIST channel
- remote program

The three paragraphs in the manual describe the timeout for outgoing messages.

On page 3-11 add this immediately before the Send Unprotected section:

List Channel

This timeout detects a DH/DH+ station going off the link while still having an allocated LIST channel. Set this value high enough to prevent a timeout while running LIST but not so high that taking a station off the link keeps the LIST channel allocated unnecessarily.

Important: This timer clears when any link activity is detected from the station holding the edit resource.

On page 3-11 add this immediately before the Send Unprotected section:

Communication Channel Back Up

You should select option four if you have a scanner in a backup system that backs up the communication channel on the scanner in the primary system. Upon making this selection, an asterisk displays next to the selection. Both scanners should have the same station number.

On page 3-15 add this at the end of the page:

DH/DH+ Switch Settings

By selecting option 10, this information displays:

DH/DH+ SET-UP SWITCH SETTINGS								(VIEW FROM TOP OF MODULE)					
S1								S2				MODULE FRONT	
DOWN/ON													
UP/OFF	X	X	X	X	X	X	X	X	X	X	X		
SWITCH #	8	7	6	5	4	3	2	4	3	2	1		
	MSD				LSD								
	STATION NUMBER IN OCTAL								MODE		BAUD		

CURRENT SELECTION	377	SOFT	INVALID
1 EXIT THIS MENU	NOTE:	SWITCH CHANGES ARE ONLY READ AFTER POWER UP	
ENTER NEXT >			

DH+ Active Node List

If you are using channel four for Data Highway Plus communication, then by selecting option 11, a list of active nodes on the local link displays:

- An X next to a node number indicates a node present on the link.
- A US next to a node number indicates the station number of the scanner.

LIST OF ACTIVE STATIONS ON THE LOCAL DH+ LINK

TOTAL NUMBER OS STATIONS ON LOCAL LINK 7

0	X	10	20	30	40	50	60	70
1	X	11	21	31	41	51	61	71
2	X	12	22	32	42	52	62	72
3	X	13	23	33	43	53	63	73
4	X	14	24	34	44	54	64	74
5	X	15	25	35	45	55	65	75
6	US	16	26	36	46	56	66	76
7		17	27	37	47	57	67	77

1 EXIT THIS MENU

2 REDISPLAY MENU

Operating a Backup System on a Data Highway Plus

On page 5-13 add this at the end of the page:

Data Highway Plus backup has been enhanced to operate similarly to Data Highway backup. Assign the same station number to both scanners. Once you do this, the scanner in the backup system assumes a different address:

If the address is between	Then the scanner in the backup system assumes an address that is
000 ₈ and 037 ₈	040 ₈ higher than the scanner in the primary system
040 ₈ and 077 ₈	040 ₈ lower than the scanner in the primary system

When switchover occurs, the address for the scanner in the backup system returns to the value that you assigned since it is now in the primary system.

Refer to chapter 5 in the user's manual for detailed information on backup operation.

**Programming Examples for
a Message Procedure**

On page 7-22 replace the fifth line of figure 7.10 with this line:

```
CREATE @ ERR_BLK $E2.3.TH.3.5.4.0
```

Remote Error Codes

On page B-2 replace the sixth line of this section with this:

```
#E2.3<scanner thumbwheel setting>.3.5.4.0
```

Specifications

On page D-1 replace the first bullet of the I/O Capacity per Scanner specification with this:

- 2,048 I/O (any mix)

**PLC-3 Family I/O Scanner
Communication-Adapter Module**
Table of Contents



As a subsidiary of Rockwell International, one of the world's largest technology companies — Allen-Bradley meets today's challenges of industrial automation with over 85 years of practical plant-floor experience. More than 11,000 employees throughout the world design, manufacture and apply a wide range of control and automation products and supporting services to help our customers continuously improve quality, productivity and time to market. These products and services not only control individual machines but integrate the manufacturing process, while providing access to vital plant floor data that can be used to support decision-making throughout the enterprise.

With offices in major cities worldwide

**WORLD
HEADQUARTERS**
Allen-Bradley
1201 South Second Street
Milwaukee, WI 53204 USA
Tel: (1) 414 382-2000
Telex: 43 11 016
FAX: (1) 414 382-4444

**EUROPE/MIDDLE
EAST/AFRICA
HEADQUARTERS**
Allen-Bradley Europe B.V.
Amsterdamseweg 15
1422 AC Uithoorn
The Netherlands
Tel: (31) 2975/43500
Telex: (844) 18042
FAX: (31) 2975/60222

**ASIA/PACIFIC
HEADQUARTERS**
Allen-Bradley (Hong Kong)
Limited
Room 1006, Block B, Sea
View Estate
28 Watson Road
Hong Kong
Tel: (852) 887-4788
Telex: (780) 64347
FAX: (852) 510-9436

**CANADA
HEADQUARTERS**
Allen-Bradley Canada
Limited
135 Dundas Street
Cambridge, Ontario N1R
5X1
Canada
Tel: (1) 519 623-1810
FAX: (1) 519 623-8930

**LATIN AMERICA
HEADQUARTERS**
Allen-Bradley
1201 South Second Street
Milwaukee, WI 53204 USA
Tel: (1) 414 382-2000
Telex: 43 11 016
FAX: (1) 414 382-2400